

ROHS REACH

| | | | |
|------------------|------------|---------------------|-------------------|
| | | | |
| | | | |
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVALBY |

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 2AMP

Rating Current: 2AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40℃ to +105℃




Operation Temperature: -40℃ to +105℃

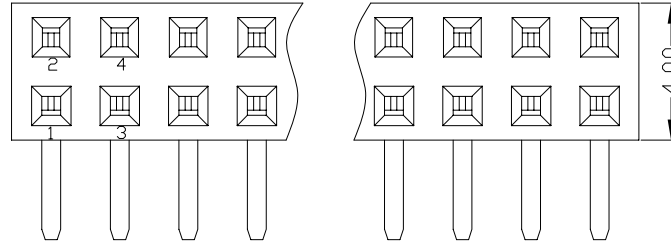

Ordering Information

F2000R-12 XX XX X 63 X 1

| | | | | | |
|--------------------------|--|--|---|-----------------------------|---|
| No. of Pins Per Row 2-40 | Contact Plating Full of Gold A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U' S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature | Semi-gold B0=0.8U' B1=1.5U' B2=2U' B3=3U' B5=5U' B10=10U' B15=15U' B20=20U' B30=30U' | Insulator Material: A: PBT B: PA6T C: PA9T D: LCP | HEIGHT OF HOUSING 63±0.35mm | Packing A=PE Bag B=Tape&Reel C=Tube D=Tube+Cap E=Tray |
|--------------------------|--|--|---|-----------------------------|---|

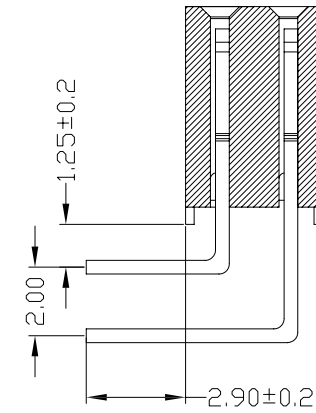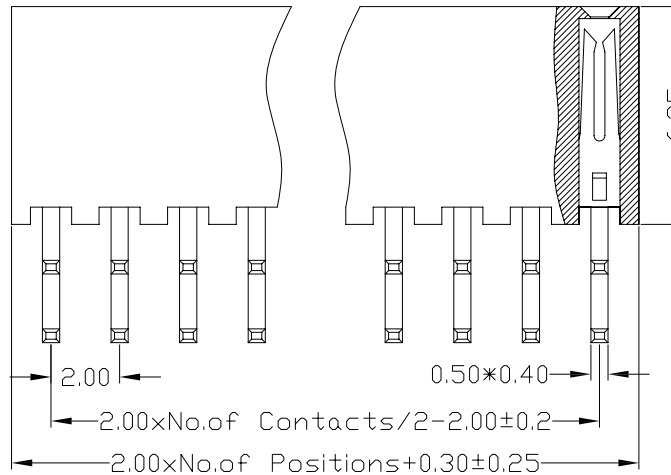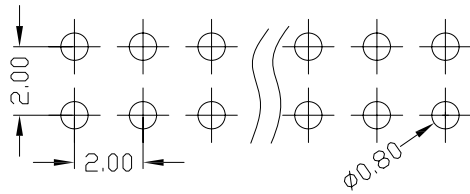

| | | |
|------------|-------------------|----------|
| MATERIAL: | GENERAL TOLERANCE | |
| UNIT: MM | X. ±0.30 | X.* ±2* |
| SCALE: 3:1 | X.X ±0.25 | X.X* ±1* |
| SIZE: A4 | X.XX ±0.15 | |

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: F2000R-12XXXXX63X1
TITLE: 2.00MM 双排母 塑高6.35 90°Y型

| | | | |
|------------|---------|-------|--------|
| REV: A | APPROVE | CHECK | DRAWN |
| SHEET: 1/1 | FENG | ZENG | LIJIAN |