

# ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

## SPECIFICATIONS

备注 (Remark)

### 1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"min Gold Plating Over All  
30u"min Nickel Underplating Over All

### 2. 特性 (characteristics):

额定电流: 2AMP

Raring Current: 2AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40℃ to +105℃




Operation Temperature: -40℃ to +105℃

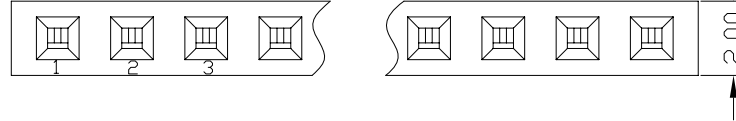

## Ordering Information

### F2000V-11 XX XX X 63 X 1Y

No. of Pins Per Row 1-40	Contact Plating Full of Gold	Semi-gold	Insulator Material:	HEIGHT OF HOUSING 63±0.35mm	Packing A=PE Bag B=Tape&Reel C=Tube D=Tube+Cap E=Tray
A0=0.8U'	B0=0.8U'	A=PA6T			
A1=1U'	B0=1.5U'	B=PA6T			
A2=1.5U'	B0=2U'	C=PA9T			
A3=2U'	B0=3U'	D=LCP			
A4=3U'	B0=5U'				
A5=5U'	B0=10U'				
A6=10U'	B0=15U'				
A7=15U'	B0=20U'				
A8=20U'	B0=30U'				
A9=30U'					
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-platde High-temperature				

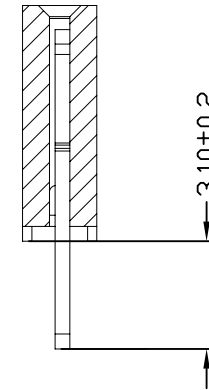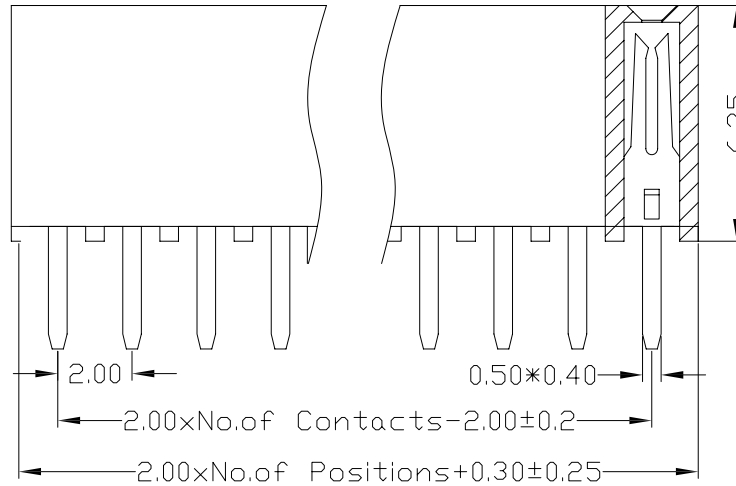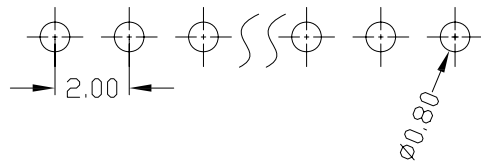

REV: A			APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE		<b>东莞市轩盟电子科技有限公司</b> DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD
SHEET:1/1			FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2°	
						SCALE: 3:1	X.X ±0.25	X.X* ±1°	
						SIZE: A4	X.XX ±0.15		
						PART NO: F2000V-11XXXXX63X1Y			
						TITLE : 2.00MM 排母 塑高6.35 180° Y型			