

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 2AMP

Raring Current: 2AMP

接触阻抗: 20M Ω MAX

Contact Resistance: 20m Ω Max

绝缘阻抗: 1000M Ω MIN


Insulation Resistance: 1000M Ω Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40℃ to +105℃




Operation Temperature: -40℃ to +105℃

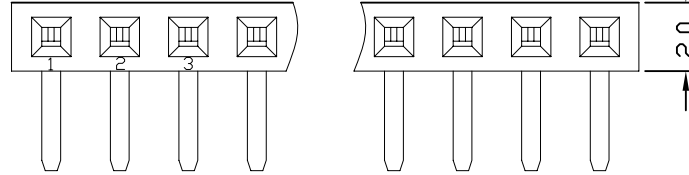

Ordering Information

F2000R-11 XX XX X 63 X 1Y

No. of Pins Per Row 2-40	Contact Plating Full of Gold A0=0.8U" A1=1U" A2=1.5U" A3=2U" A4=3U" A5=5U" A6=10U" A7=15U" A8=20U" A9=30U" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	Insulatot Material: A: PBT B: PA6T C: PA9T D: LCP	HEIGHT OF HOUSING 63/6.35mm	Packing A=PE Bag B=Tape&Reel C=Tube D=Tube+Cap E=Tray
-----------------------------	--	---	---	--------------------------------	--

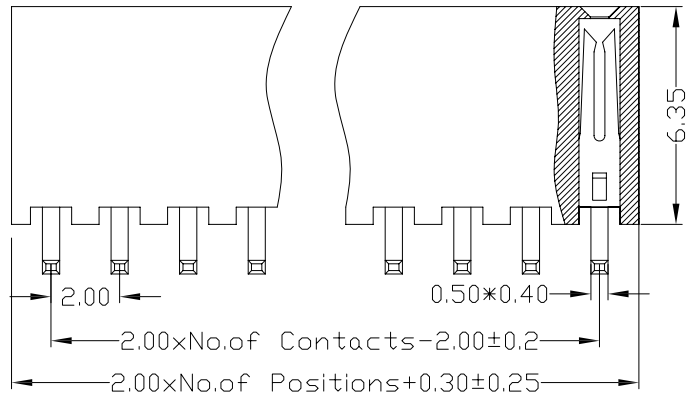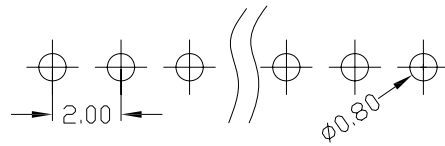

MATERIAL:	GENERAL TOLERANCE	
UNIT: MM	X. ±0.30	X.* ±2°
SCALE: 3:1	X.X ±0.25	X.X* ±1°
SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: F2000R-11XXXXX63X1Y

TITLE: 2.00MM 排母 塑高6.35 90°Y型

REV: A	APPROVE	CHECK	DRAWN
SHEET: 1/1	FENG	ZENG	LIJIAN