

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 2AMP

Rating Current: 2AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V


Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C

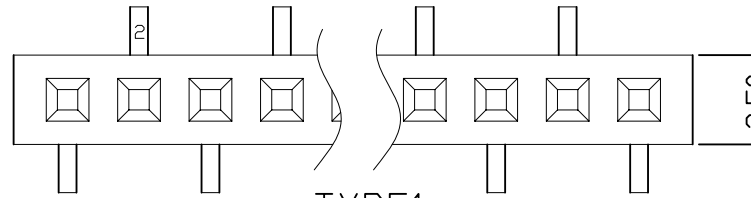

TYPE1



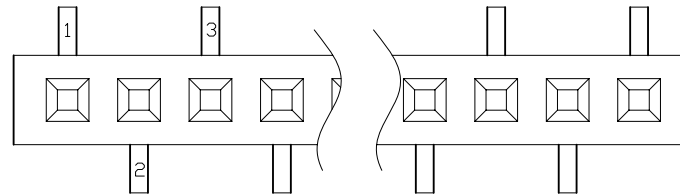


TYPE2

Ordering Information

F2000W-11 XX XX X 43 X X

No. of Pins Per Row 1-40	Contact Plating Full of Gold	Semi-gold	Insulator Material	HEIGHT OF HOUSING	Packing	TYPE1/TYPE2
A0=0.8U'	B0=0.8U'	BPA6T	43/4.3mm	A=PE Bag	TYPE1	
A1=1U'	B0=1.5U'	CPA9T		B=Tape&Reel	TYPE2	
A2=1.5U'	B0=2U'	DLCP		C=Tube		
A3=2U'	B0=3U'			D=Tube+Cap		
A4=3U'	B0=5U'			E=Tray		
A5=5U'	B0=10U'					
A6=10U'	B0=15U'					
A7=15U'	B0=20U'					
A8=20U'	B0=30U'					
A9=30U'						
	S1=Ordinary Tin Plated					
	S2=Matte Tin Plated					
	S3=Tin-platde High-temperature					

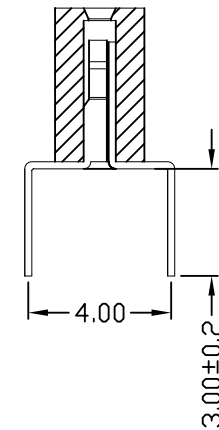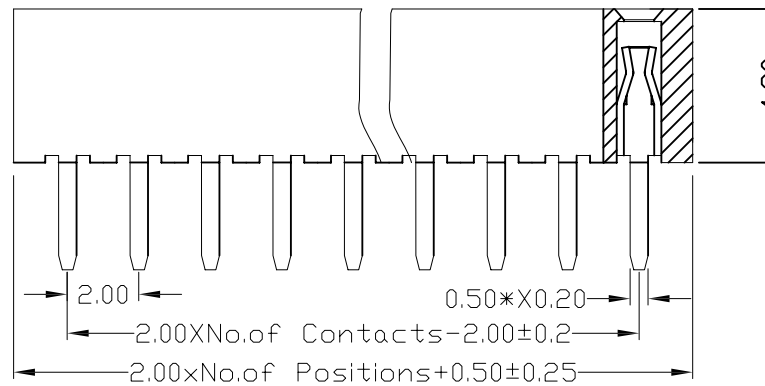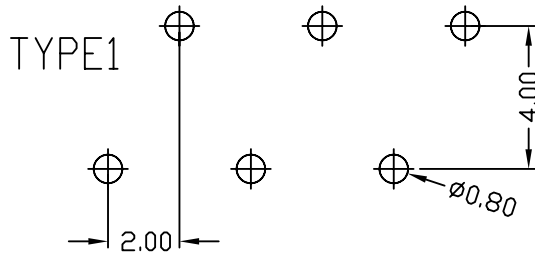

MATERIAL:	GENERAL TOLERANCE
UNIT: MM	X. ±0.30 X.* ±2*
SCALE: 3:1	X.X ±0.25 X.X* ±1*
SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: F2000W-11XXXXX43XX

TITLE: 2.00MM 排母 塑高4.3 蜈蚣脚 U型

REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN