

# ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

## SPECIFICATIONS

备注 (Remark)

### 1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色

Housing: LCP/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30U"MIN, 表面镀金1U"MIN

Contact: Phosphor bronze, 1u"min Gold Plating Over All  
30u"min Nickel Underplating Over All

### 2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN

Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC





温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C

## Ordering Information

F2540W-11 XX XX D 85 X X

No. of Pins Per Row 1-40	Contact Plating Full of Gold	Semi-gold	Insulator Material: DuLCP	HEIGHT OF HOUSING 85/8.51mm	Packing A=PE Bag B=Tape&Reel C=Tube D=Tube+Cap E=Tray
A0=0.8U'	B0=0.8U'				
A1=1U'	B0=1.5U'				
A3=2U'	B0=2U'				
A4=3U'	B0=3U'				
A5=5U'	B0=5U'				
A6=10U'	B0=10U'				
A7=15U'	B0=15U'				
A8=20U'	B0=20U'				
A9=30U'	B0=30U'				
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-platde High-temperature				

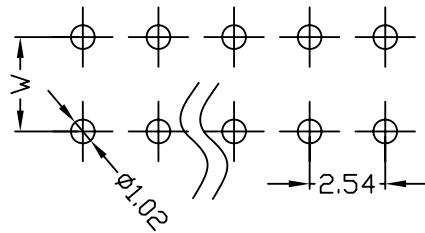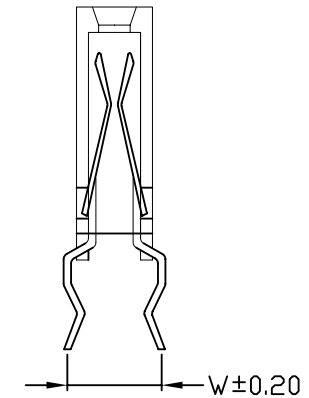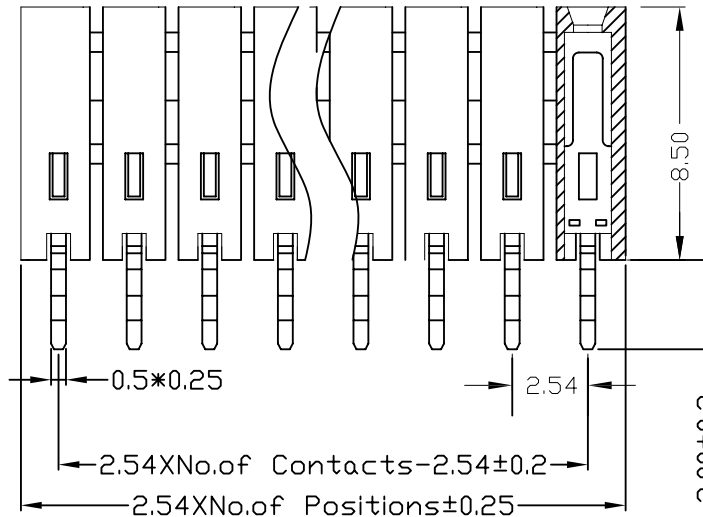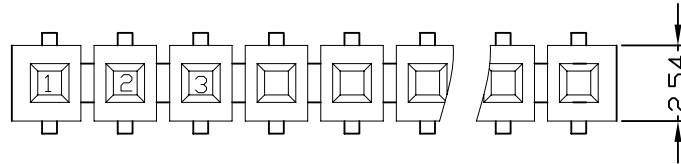

PART NO	W
F2540W-11XXXXD85X1	3.17
F2540W-11XXXXD85X2	3.96
F2540W-11XXXXD85X3	5.08

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE
SHEET: 1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2*
				SCALE: 3:1	X.X ±0.25 X.X* ±1*
				SIZE: A4	X.XX ±0.15

**YSTZ** 东莞市轩盟电子科技有限公司  
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: F2540W-11XXXXD85XX

TITLE: 2.54MM 排母 塑高8.5 180°U型 蜈蚣脚