

ROHS REACH

日期版次	日期	变更内容	核 准
REVISION	DATE	DESCRIPTION	APPROVALBY

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30μMIN, 表面镀金1UμMIN

Contact: Phosphor bronze, 1uμmin Gold Plating Over All
30uμmin Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN

Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC





温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C

Ordering Information

F2540R-11 XX XX X 57 X 1Y

No. of Pins Per Row 1-40	Contact Plating Full of Gold A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B1=1.5U' B2=2U' B3=3U' B5=5U' B10=10U' B15=15U' B20=20U' B30=30U'	Insulatot Material: A: PBT B: PA6T C: PA9T D: LCP	HEIGHT OF HOUSING 57/5.7mm	Packing A=PE Bag B=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature				

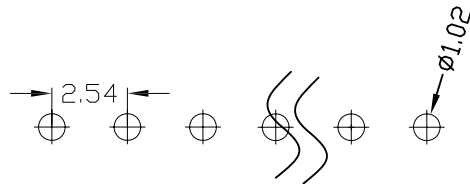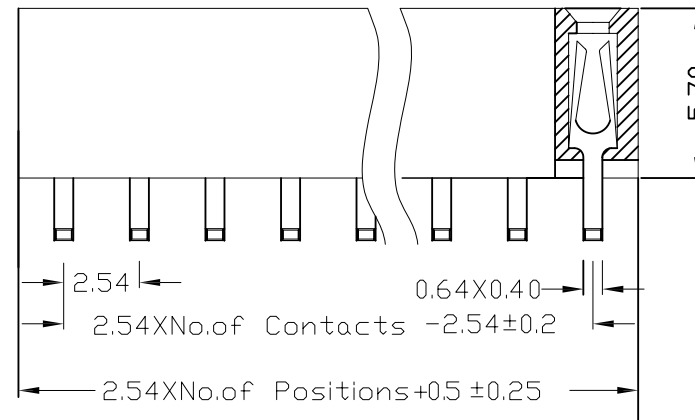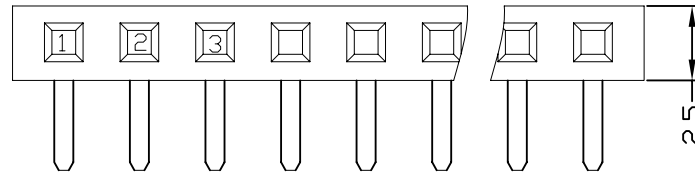

				MATERIAL:	GENERAL TOLERANCE		东莞市轩盟电子科技有限公司 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD
REV: A	APPROVE	CHECK	DRAWN	UNIT: MM	X. ±0.30	X.* ±2*	
SHEET: 1/1	FENG	ZENG	LIJIAN	SCALE: 3:1	X.X ±0.25	X.X* ±1*	
				SIZE: A4	X.XX ±0.15		
				PART NO: F2540R-11XXXXX57X1Y			TITLE: 2.54MM 排母 塑高5.7 90°Y型
				TITLE: 2.54MM 排母 塑高5.7 90°Y型			