

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30U"MIN, 表面镀金1U"MIN

Contact: Phosphor bronze, 1u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C




Operation Temperature: -40°C to +105°C

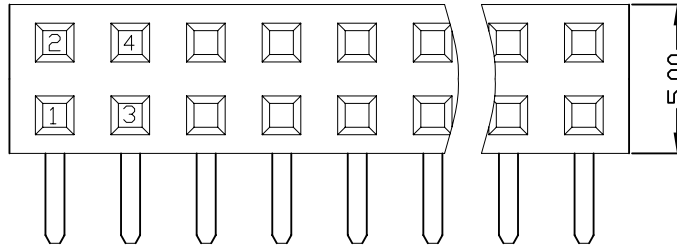

Ordering Information

F2540R-12 XX XX X 57 X 1Y

No. of Pins Per Row 2-40	Contact Plating Full of Glod	Semi-gold	Insulatot Material:	HEIGHT OF HOUSING 57/5.7mm	Packing A=PE Bag B=Tape&Reel C=Tube D=Tube+Cap E=Tray
A0=0.8U'	A1=1U'	A2=1.5U'	A3=2U'	A4=3U'	A5=5U'
A6=10U'	A7=15U'	A8=20U'	A9=30U'	S1=Ordinary Tin Plated	S2=Matte Tin Plated
B0=0.8U'	B0=1.5U'	B0=2U'	B0=3U'	B0=5U'	B0=10U'
B0=15U'	B0=20U'	B0=30U'	S3=Tin-platde High-temperature		

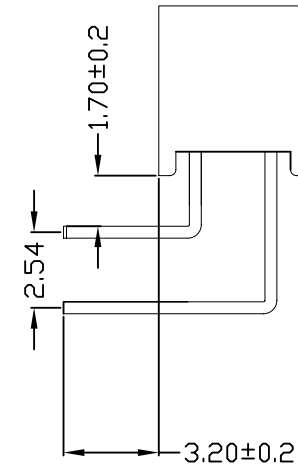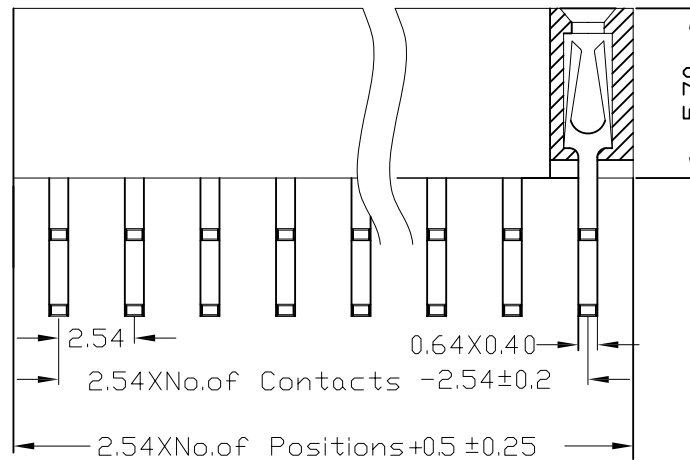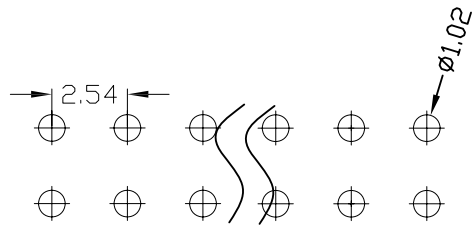

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	东莞市轩盟电子科技有限公司 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2*	
				SCALE: 3:1	X.X ±0.25 X.X* ±1*	
				SIZE: A4	X.XX ±0.15	PART NO: F2540R-12XXXXX57X1Y TITLE: 2.54MM 双排母 塑高5.7 90°Y型