

ROHS REACH

| | | | |
|------------------|------------|---------------------|-----------------|
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVAL |
|------------------|------------|---------------------|-----------------|

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30U~MIN, 表面镀金0.8U~MIN
 Contact: Brass, 0.8u~min Gold Plating Over All
 30u~min Nickel Underplating Over All





2. 特性 (characteristics):

额定电流: 1.0 AMP
 Raring Current: 1.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

Ordering Information

P1270V-11 XX XX X 10 XXX X 1

| | | | | | | |
|--------------------------|--|---|--|----------------------------|--------------------|---|
| No. of Pins Per Row 1-50 | Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U' | Semi-gold B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U' | Insulatot Material: B=BK-PA6T C=BK-PA9T D=BK-LCP | HEIGHT OF HOUSING 10±0.0mm | Length of Terminal | Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray |
| | S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature | | | | | |

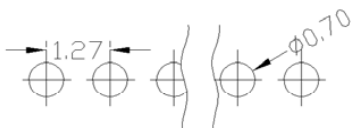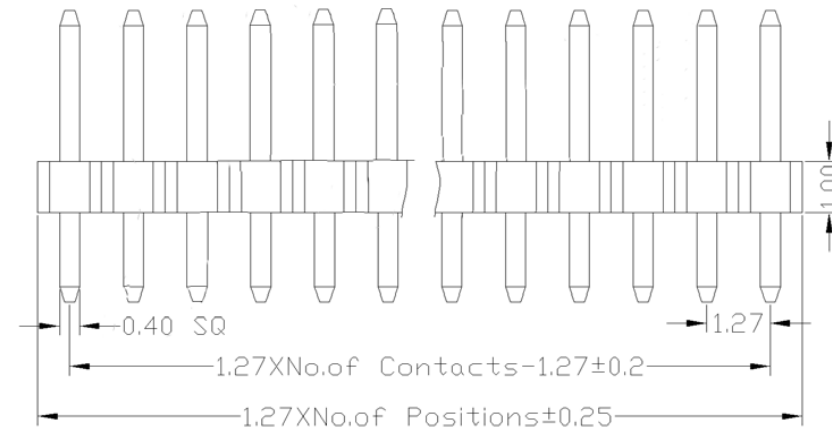

| ITEM | A | | B | |
|-----------|-----|-----|---|---|
| Standard | 1.8 | 1.8 | 3 | 4 |
| Alternate | | | | |

| | | | | | | | |
|-----------|---------|-------|--------|------------|-------------------|----------|---|
| | | | | MATERIAL: | GENERAL TOLERANCE | | 东莞市轩盟电子科技有限公司 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD PART NO: P1270V-11XXXXX10XXXX1 TITLE : 1.27MM 单排针 180° |
| REV: A | APPROVE | CHECK | DRAWN | UNIT: MM | X. ±0.30 | X.* ±2° | |
| SHEET:1/1 | FENG | ZENG | LIJIAN | SCALE: 3:1 | X.X ±0.25 | X.X* ±1° | |
| | | | | SIZE: A4 | X.XX ±0.15 | | |

ROHS REACH

| | | | |
|------------------|------------|---------------------|-----------------|
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVAL |
|------------------|------------|---------------------|-----------------|

SPECIFICATIONS


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):



额定电流: 1.0 AMP
 Raring Current: 1.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

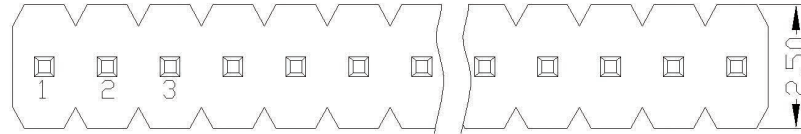

Ordering Information

P1270V-11 XX XX X XX XXX X 1

| | | | | | | |
|--------------------------|--|---|--|--|--------------------|---|
| No. of Pins Per Row 1-50 | Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U' | Semi-gold B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U' | Insulatot Material: B=BK-PA6T C=BK-PA9T D=BK-LCP | HEIGHT OF HOUSING 161.6mm 20±0.0MM 25±2.54MM | Length of Terminal | Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray |
| | S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature | | | | | |

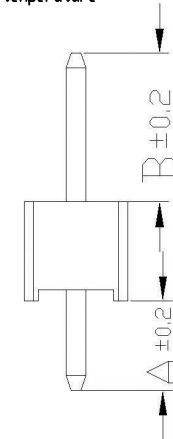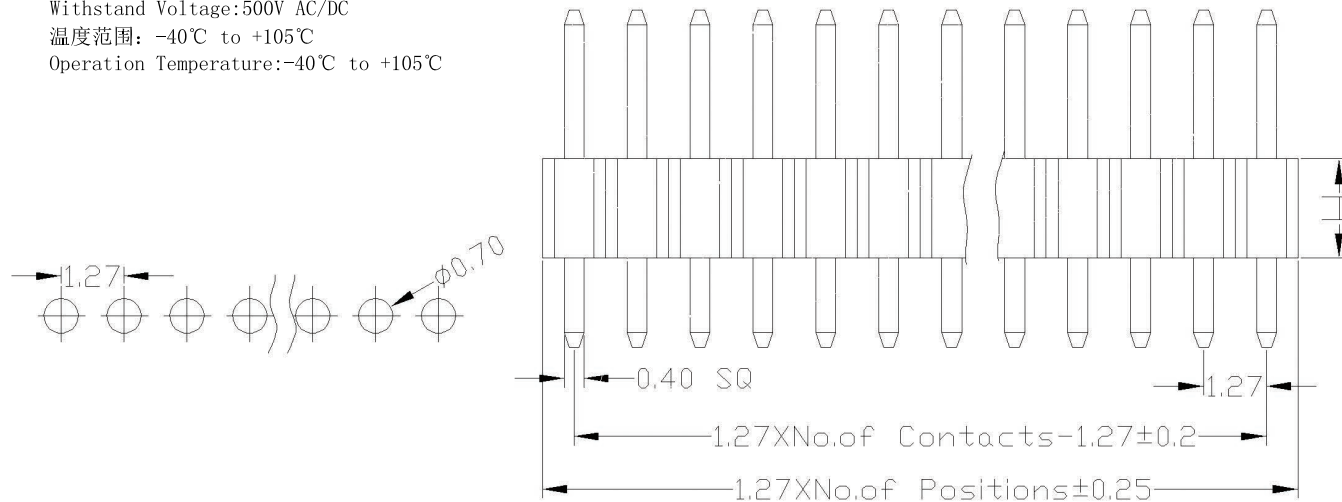

| Dimension antitheses list | | | | | | | |
|---------------------------|-----|-----|---|---|-----|---|------|
| ITEM | A | B | | H | | | |
| Standard | 1.8 | 1.8 | 3 | 4 | 1.6 | 2 | 2.54 |
| Alternate | | | | | | | |

| | | | | | | |
|-----------|---------|-------|--------|------------|-------------------|----------|
| REV: A | APPROVE | CHECK | DRAWN | MATERIAL: | GENERAL TOLERANCE | |
| SHEET:1/1 | FENG | ZENG | LIJIAN | UNIT: MM | X. ±0.30 | X.* ±2* |
| | | | | SCALE: 3:1 | X.X ±0.25 | X.X* ±1* |
| | | | | SIZE: A4 | X.XX ±0.15 | |

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270V-11XXXXXXXXXXXXX1

TITLE : 1.27MM 单排针 180°

ROHS REACH

| | | | |
|------------------|------------|---------------------|-----------------|
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVAL |
|------------------|------------|---------------------|-----------------|

SPECIFICATIONS


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):




额定电流: 1.0 AMP
 Raring Current: 1.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C



Ordering Information

P1270V-21 XX XX X 10 XXX X 1

| | | | | | | |
|--------------------------|--|---|--|---------------------------|--------------------|---|
| No. of Pins Per Row 1-50 | Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U' | Semi-gold B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U' | Insulatot Material: B=BK-PA6T C=BK-PA9T D=BK-LCP | HEIGHT OF HOUSING 101.0mm | Length of Terminal | Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray |
| | S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature | | | | | |

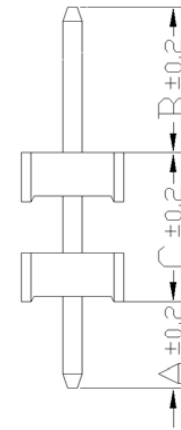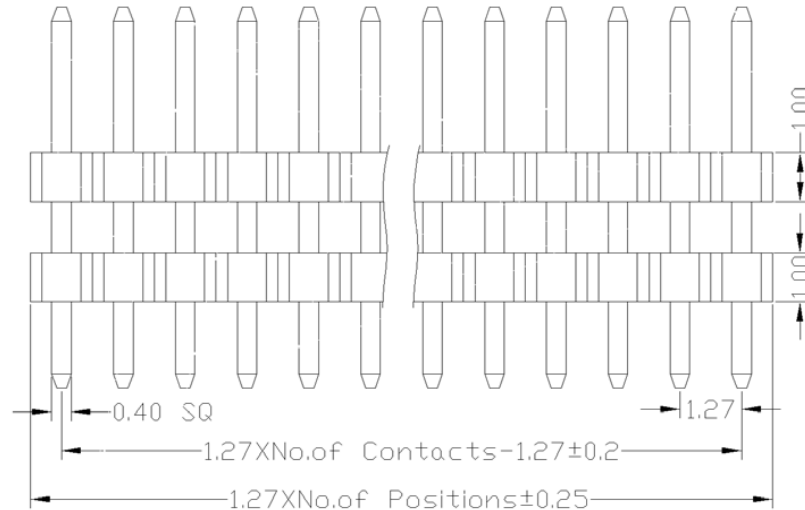

Dimension antitheses list

| ITEM | A | B | C |
|----------|-----|-----|-----|
| Standard | 1.8 | 1.8 | 3 4 |
| Alternat | | | |

| | | | | | |
|-----------|---------|-------|--------|------------|--------------------|
| REV: A | APPROVE | CHECK | DRAWN | MATERIAL: | GENERAL TOLERANCE |
| SHEET:1/1 | FENG | ZENG | LIJIAN | UNIT: MM | X. ±0.30 X.* ±2° |
| | | | | SCALE: 3:1 | X.X ±0.25 X.X* ±1° |
| | | | | SIZE: A4 | X.XX ±0.15 |

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270V-21XXXXX10XXXX1

TITLE: 1.27MM 单排针 双塑 180°

ROHS REACH

| | | | |
|------------------|------------|---------------------|-----------------|
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVAL |
|------------------|------------|---------------------|-----------------|

Ordering Information

P1270V-21 XX XX X XX XXX X 1

| | | | | | | |
|-----------------------------|--------------------------------|-----------|---|---|--------------------|--|
| No. of Pins Per Row 1-50 | Full of Gold | Semi-gold | Insulator Material: B=BK-PA6T C=BK-PA9T D=BK-LCP | HEIGHT OF HOUSING 16.16mm 20.20mm 25.254mm | Length of Terminal | Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray |
| | A0=0.8U" | B0=0.8U" | | | | |
| | A1=1U" | B0=1U" | | | | |
| | A2=1.5U" | B0=1.5U" | | | | |
| | A3=2U" | B0=2U" | | | | |
| | A4=3U" | B0=3U" | | | | |
| | A5=5U" | B0=5U" | | | | |
| | A6=10U" | B0=10U" | | | | |
| | A7=15U" | B0=15U" | | | | |
| | A8=20U" | B0=20U" | | | | |
| A9=30U" | B0=30U" | | | | | |
| | S1=Ordinary Tin Plated | | | | | |
| | S2=Matte Tin Plated | | | | | |
| | S3=Tin-plated High-temperature | | | | | |

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 1.0 AMP

Rating Current: 1.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN





Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C

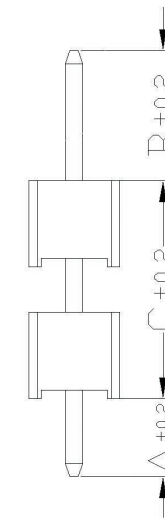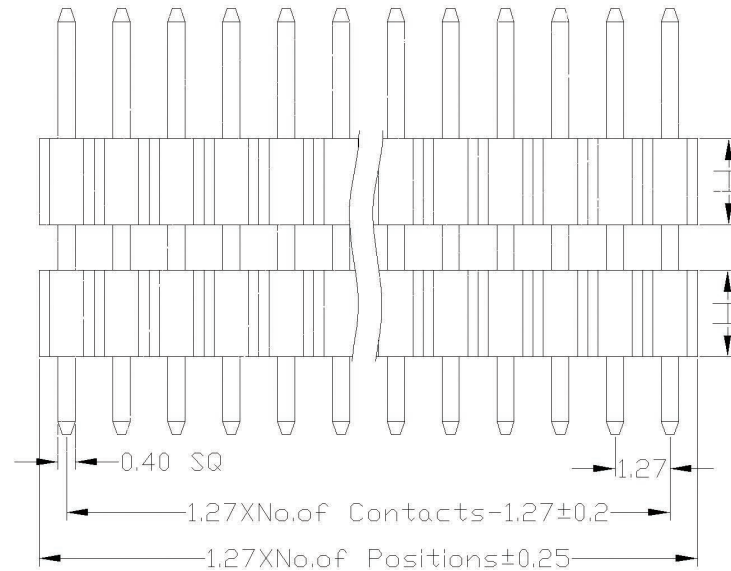

| Dimension antitheses list | | | | | | | |
|---------------------------|-----|-----|---|---|-----|---|------|
| ITEM | A | B | | H | | C | |
| Standard | 1.8 | 1.8 | 3 | 4 | 1.6 | 2 | 2.54 |
| Alternate | | | | | | | |

| | | | | | | |
|------------|---------|-------|--------|------------|-------------------|----------|
| REV: A | APPROVE | CHECK | DRAWN | MATERIAL: | GENERAL TOLERANCE | |
| SHEET: 1/1 | FENG | ZENG | LIJIAN | UNIT: MM | X. ±0.30 | X.* ±2° |
| | | | | SCALE: 3:1 | X.X ±0.25 | X.X* ±1° |
| | | | | SIZE: A4 | X.XX ±0.15 | |

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270V-21XXXXXXXXXXXXX1

TITLE: 1.27MM 单排针 双塑 180°

5

4

3

2

1