

# ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY

## SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN

Contact: Brass, 0.8u"min Gold Plating Over All  
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 0.75 AMP

Raring Current: 0.75 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C




Operation Temperature: -40°C to +105°C

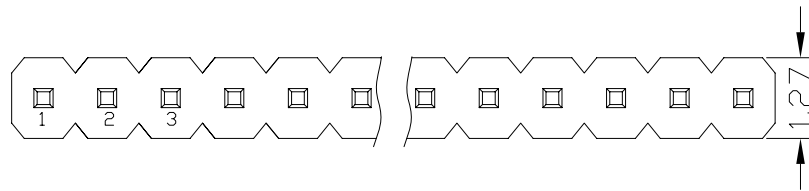

## Ordering Information

P1000V-11 XX XX X XX XXX X 1

No. of Pins Per Row 1-50	Contact Plating Full of Gold	Semi-gold	Insulatot Material	HEIGHT OF HOUSING	Length of Terminal	Packing
A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'		B=BK-PA6T C=BK-PA9T D=BK-LCP	101.0mm 151.5mm		A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
			S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature			

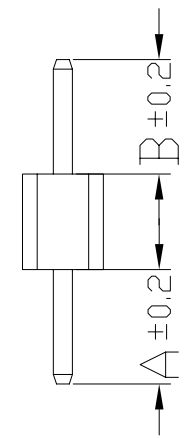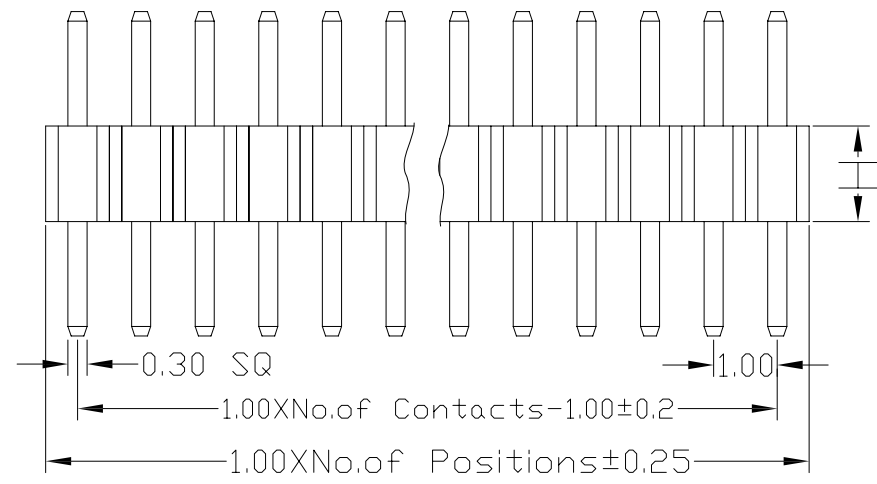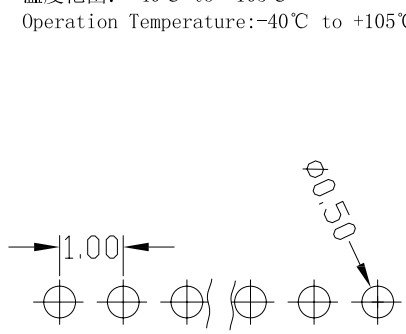

ITEM	A	B	H
Standard	1.8	1.8	1 1.5
Alternate			

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2°
				SCALE: 3:1	X.X ±0.25 X.X* ±1°
				SIZE: A4	X.XX ±0.15

**YSTZ 东莞市轩盟电子科技有限公司**  
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1000V-11XXXXXXXXXXXXX1

TITLE: 1.00MM 单排针 180°

# ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL
------------------	------------	---------------------	-----------------

## SPECIFICATIONS


备注 (Remark)

### 1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色  
 Housing: PA6T+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN  
 Contact: Brass, 0.8u"min Gold Plating Over All  
 30u"min Nickel Underplating Over All

### 2. 特性 (characteristics):




额定电流: 0.75 AMP  
 Raring Current: 0.75 AMP  
 接触阻抗: 20MΩ MAX  
 Contact Resistance: 20mΩ Max  
 绝缘阻抗: 1000MΩ MIN  
 Insulation Resistance: 1000MΩ Min  
 耐电压: AC 500V  
 Withstand Voltage: 500V AC/DC  
 温度范围: -40°C to +105°C  
 Operation Temperature: -40°C to +105°C

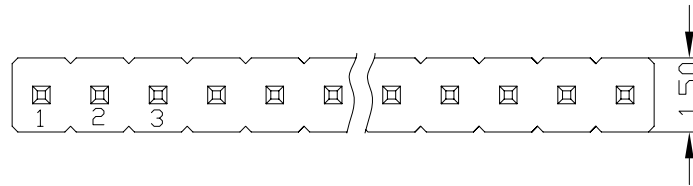

## Ordering Information

P1000V-21 XX XX X XX XXX X 1

No. of Pins Per Row 1-50	Contact Plating Full of Glod	Semi-gold	Insulatot Material	HEIGHT OF HOUSING	Length of Terminal	Packing
A0=0.8U'	A1=1U'	B0=0.8U'	B=BK-PA6T	101.0mm		A=PE Bag
A2=1.5U'	A3=2U'	B0=1.5U'	C=BK-PA9T	151.5mm		T=Tape&Reel
A4=3U'	A5=5U'	B0=2U'	D=BK-LCP			C=Tube
A6=10U'	A7=15U'	B0=3U'				D=Tube+Cap
A8=20U'	A9=30U'	B0=5U'				E=Tray
		B0=10U'				
		B0=15U'				
		B0=20U'				
		B0=30U'				
			S1=Ordinary Tin Plated			
			S2=Matte Tin Plated			
			S3=Tin-platde High-temperature			

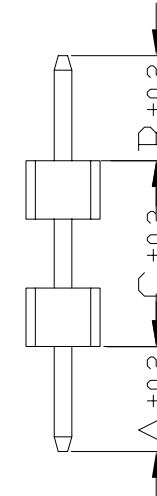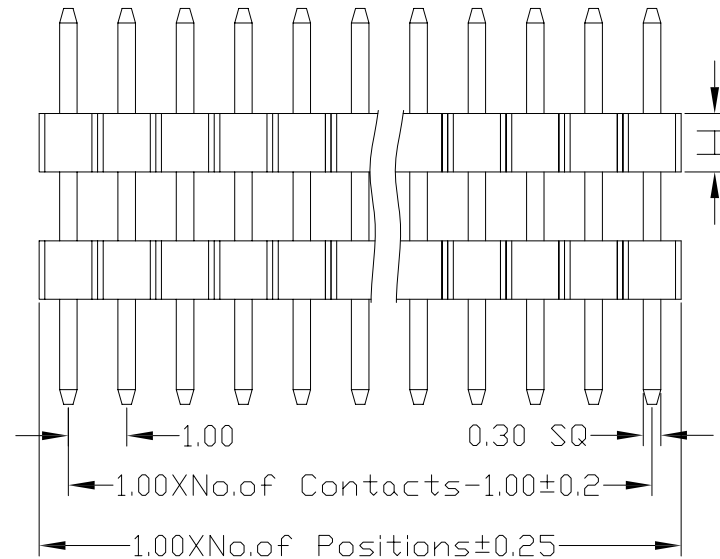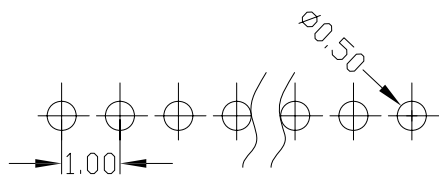

Dimension antitheses list				
ITEM	A	B	H	C
Standard	1.8	1.8	1	1.5
Alternate				

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2°
				SCALE: 3:1	X.X ±0.25	X.X* ±1°
				SIZE: A4	X.XX ±0.15	

**YSTZ 东莞市轩盟电子科技有限公司**  
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1000V-21XXXXXXXXXXXX1

TITLE: 1.00MM 单排针 双塑 180°