

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 3 AMP

Rated Current: 3 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V


Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C

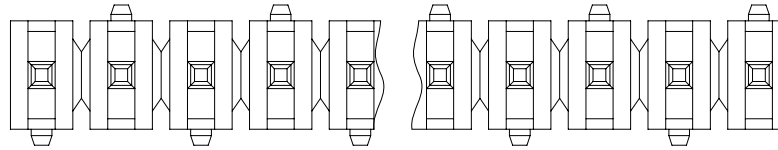

TYPE 1

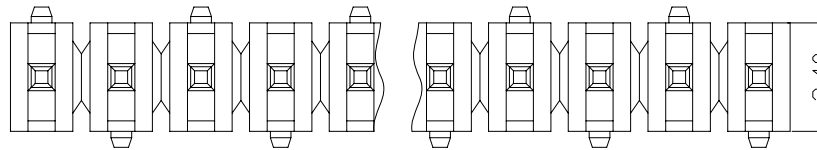


TYPE 2


Ordering Information

P2500VS-11 XX XX X 33 128 X X



No. of Pins Per Row 1-40	Contact Plating Full of Gold	Semi-gold	Insulator Material	HEIGHT OF HOUSING 33:3.3mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray	TYPE1:1 TYPE2:2
A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'		B:PA6T C:PA9T D:LCP				
			S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature				



TYPE 1



TYPE 2

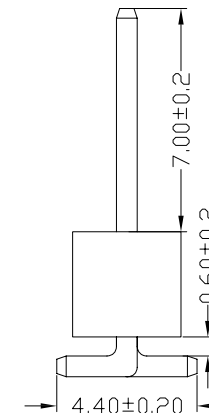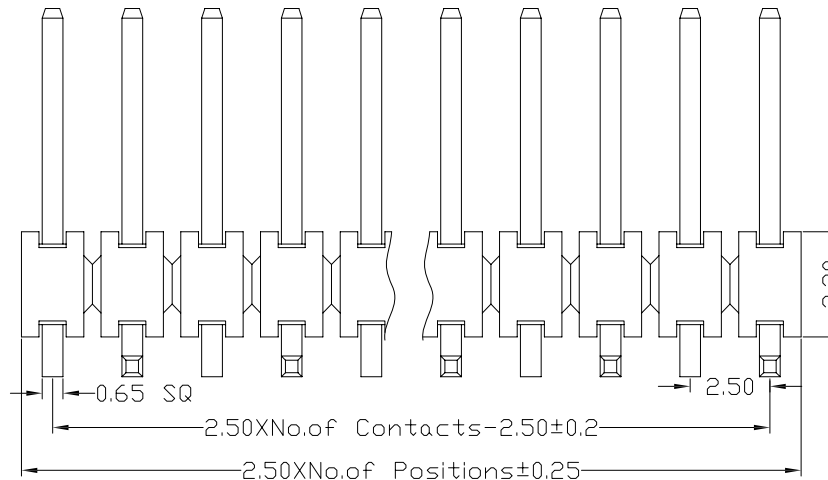

MATERIAL:	GENERAL TOLERANCE
UNIT: MM	X. ±0.30 X.* ±2°
SCALE: 3:1	X.X ±0.25 X.X* ±1°
SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P2500VS-11XXXXX33128XX
TITLE: 2.5MM 双排针 塑高3.3 SMT L=12.8MM

REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN