

ROHS REACH

日期版次	日期	变更内容	核准
REVISION	DATE	DESCRIPTION	APPROVALBY

SPECIFICATIONS


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):




额定电流: 1.0 AMP
 Raring Current: 1.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

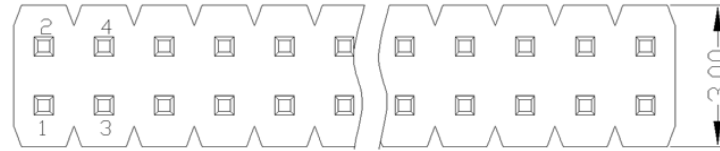

Ordering Information

P1270V-12 XX XX X XX XXX X 2

No.of Pins 2-50	Contact Plating Full of Glod A0=0.8U" A1=1U" A2=1.5U" A3=2U" A4=3U" A5=5U" A6=10U" A7=15U" A8=20U" A9=30U"	Semi-gold B0=0.8U" B0=1U" B0=1.5U" B0=2U" B0=3U" B0=5U" B0=10U" B0=15U" B0=20U" B0=30U"	Insulatot Material B=BK-PA6T C=BK-PA9T D=BK-LCP	HEIGHT OF HOUSING 161.6MM 20±2.0mm 25±2.54mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

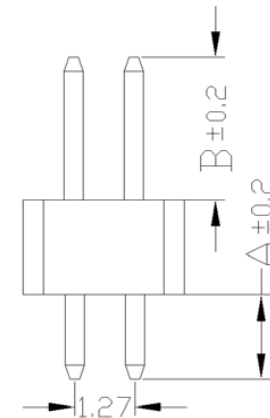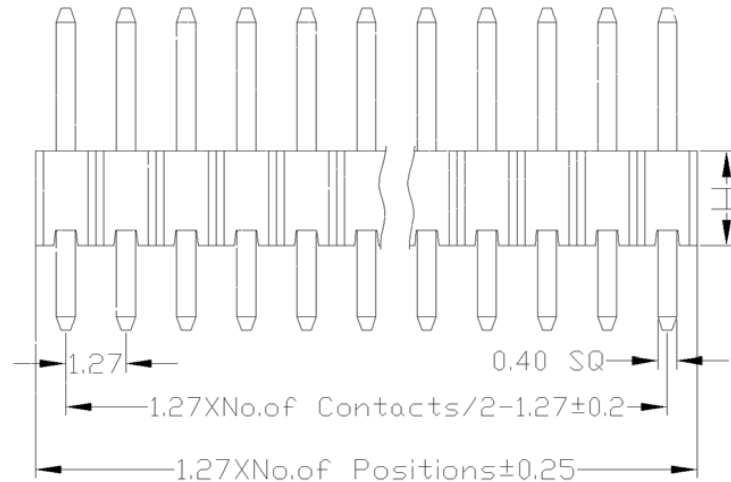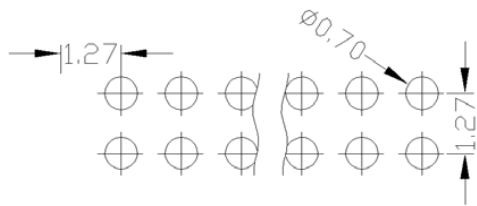

ITEM	A		B			H		
Standard	1.8	2.8	1.8	3	4	1.6	2	2.54
Alternate								

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2*
				SCALE: 3:1	X.X ±0.25	X.X* ±1*
				SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270V-12XXXXXXXXXXXXX2

TITLE : 1.27MM 双排针 180°

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL
------------------	------------	---------------------	-----------------

SPECIFICATIONS


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):



额定电流: 1.0 AMP
 Raring Current: 1.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

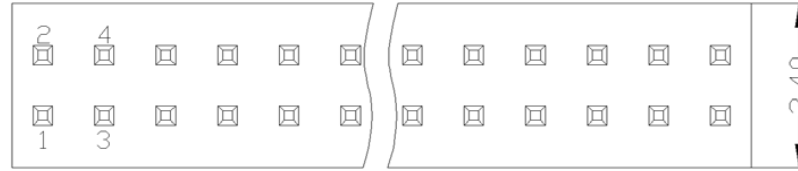

Ordering Information

P1270V-12 XX XX X 10 XXX X 2

No. of Pins Per Row 2-50	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'	Insulatot Material: B=BK-PA6T C=BK-PA9T D=BK-LCP	HEIGHT OF HOUSING 10±0.0mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

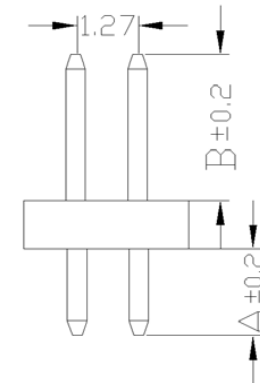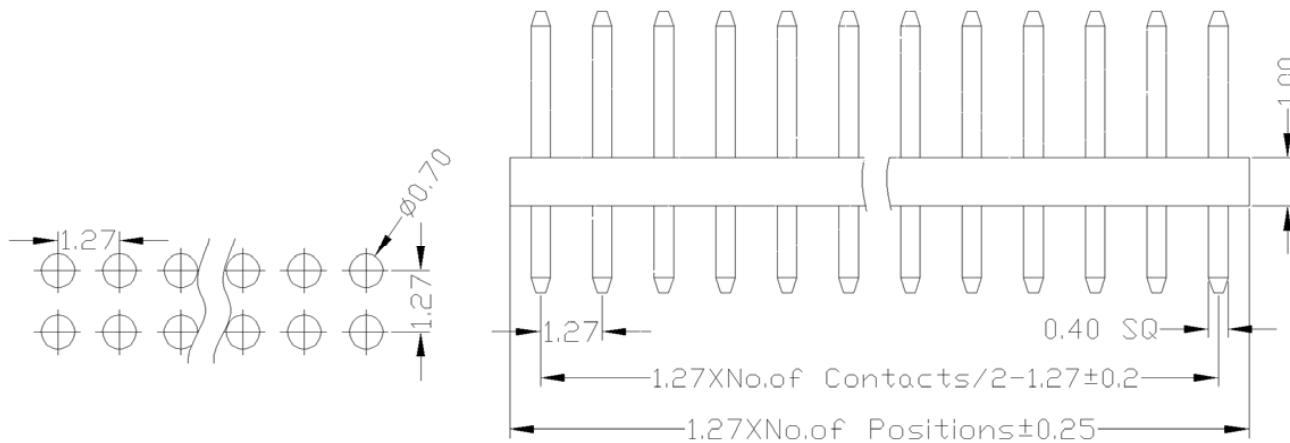

Dimension antitheses list				
ITEM	A		B	
Standard	1.8	1.8	3	4
Alternate				

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	
SHEET: 1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2°
				SCALE: 3:1	X.X ±0.25	X.X* ±1°
				SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270V-12XXXXX10XXXX2

TITLE: 1.27MM 双排针 塑高1.0 180°

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL
------------------	------------	---------------------	-----------------

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 1.0 AMP

Rating Current: 1.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C




Operation Temperature: -40°C to +105°C

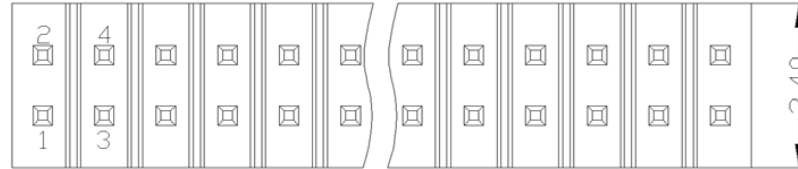

Ordering Information

P1270V-12 XX XX X 10 XXX X 3

No. of Pins Per Row 2-50	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'	Insulatot Material B=BK-PA6T C=BK-PA9T D=BK-LCP	HEIGHT OF HOUSING 10±0.0mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

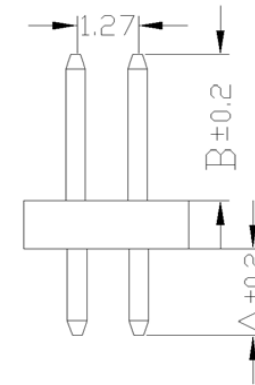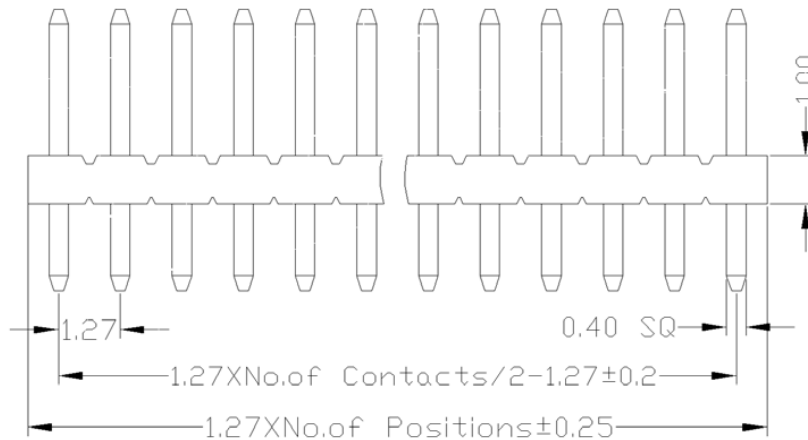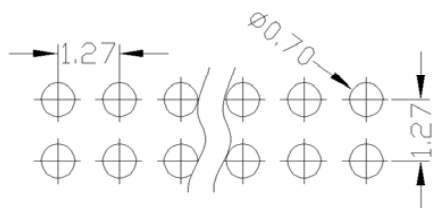

Dimension antitheses list				
ITEM	A		B	
Standard	1.8	1.8	3	4
Alternate				

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	
SHEET: 1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2°
				SCALE: 3:1	X.X ±0.25	X.X* ±1°
				SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270V-12XXXXX10XXXX3

TITLE: 1.27MM 双排针 塑高1.0 180°

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):




额定电流: 1.0 AMP
 Raring Current: 1.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

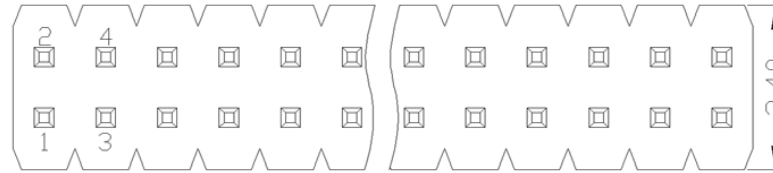

Ordering Information

P1270V-12 XX XX X XX XXX X 1

No. of Pins 2-50	Contact Plating Full of Glod A0=0.8U" A1=1U" A2=1.5U" A3=2U" A4=3U" A5=5U" A6=10U" A7=15U" A8=20U" A9=30U"	Semi-gold B0=0.8U" B0=1U" B0=1.5U" B0=2U" B0=3U" B0=5U" B0=10U" B0=15U" B0=20U" B0=30U"	Insulatot Material B=BK-PA6T C=BK-PA9T D=BK-LCP	HEIGHT OF HOUSING 08.0.8MM 101.0mm 151.5mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

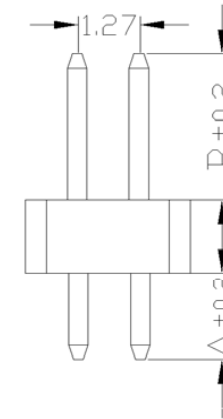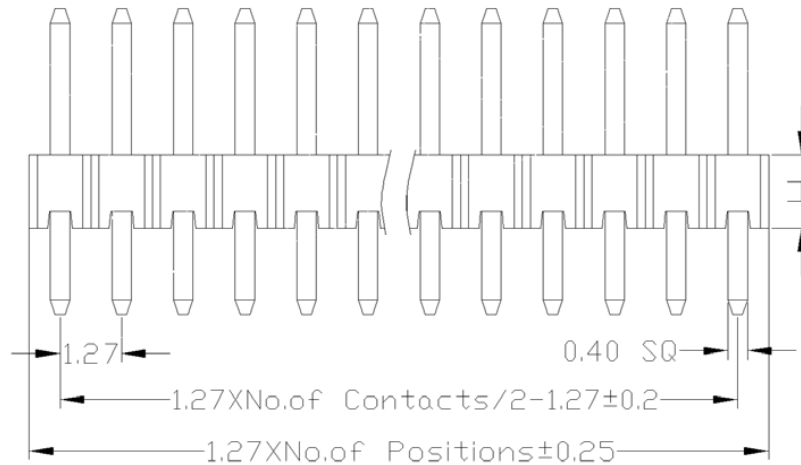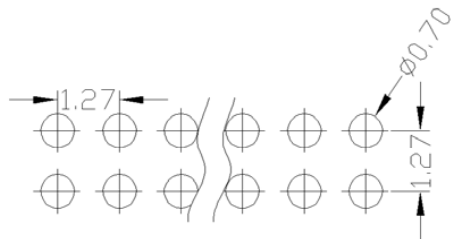

Dimension antitheses list						
ITEM	A		B		H	
Standard	1.8	1.8	3	4	0.8	1 1.5
Alternate						

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	
SHEET: 1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2*
				SCALE: 3:1	X.X ±0.25	X.X* ±1*
				SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270V-12XXXXXXXXXXXXX1

TITLE: 1.27MM 双排针 180°