

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL
------------------	------------	---------------------	-----------------

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 1.0 AMP

Rating Current: 1.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN






Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C


Operation Temperature: -40°C to +105°C

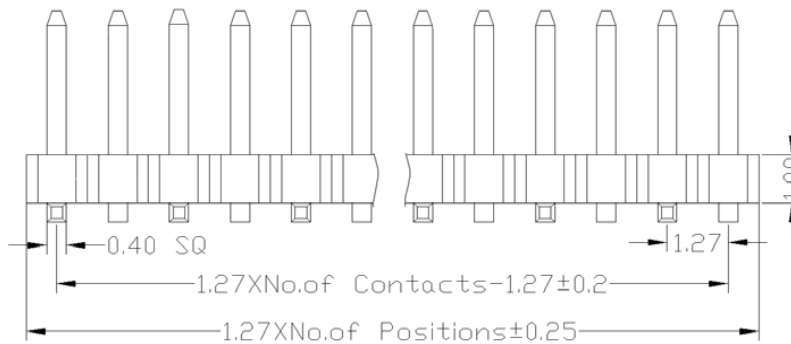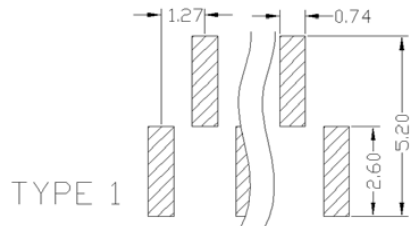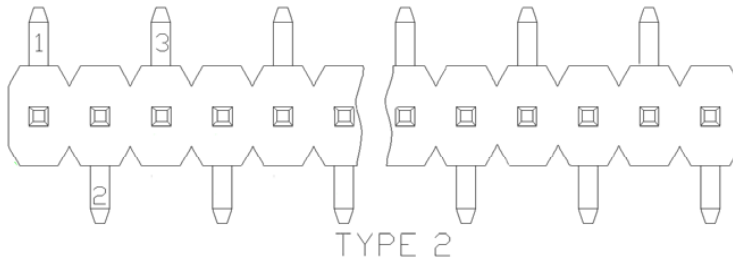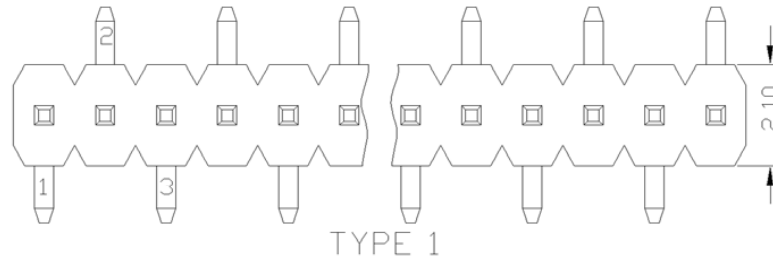

Ordering Information

P1270VS-11 XX XX X 10 XXX X X

No. of Pins Per Row 1-50	Contact Plating Full of Gold A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U'	Insulator Material B=BK-PA6T C=BK-PA9T D=BK-LCP	HEIGHT OF HOUSING 10±0.0mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray	TYPE1:1 TYPE2:2
--------------------------	--	---	---	----------------------------	--------------------	---	-----------------



Dimension antitheses list				
ITEM	D	B		
Standard	0	1.8	3	4
Alternate				

MATERIAL:	GENERAL TOLERANCE	
UNIT: MM	X. ±0.30	X.* ±2*
SCALE: 3:1	X.X ±0.25	X.X* ±1*
SIZE: A4	X.XX ±0.15	⊕ ⊖

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270VS-11XXXXX10XXXXX

TITLE: 1.27MM 单排针 SMT

REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 1.0 AMP

Raring Current: 1.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V


Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C


Operation Temperature: -40°C to +105°C

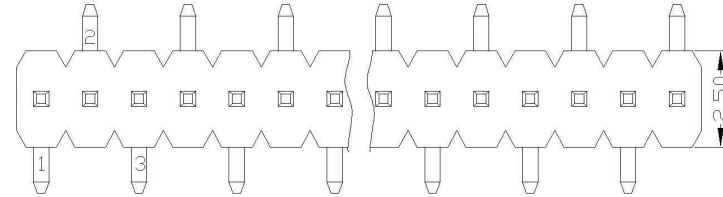


TYPE 1

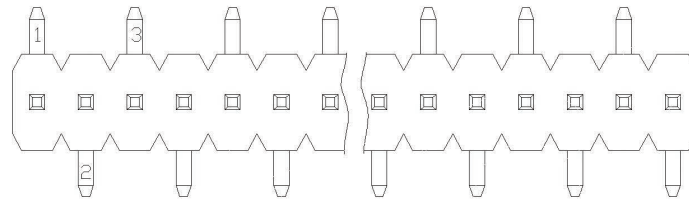


TYPE 2



TYPE 1




TYPE 2

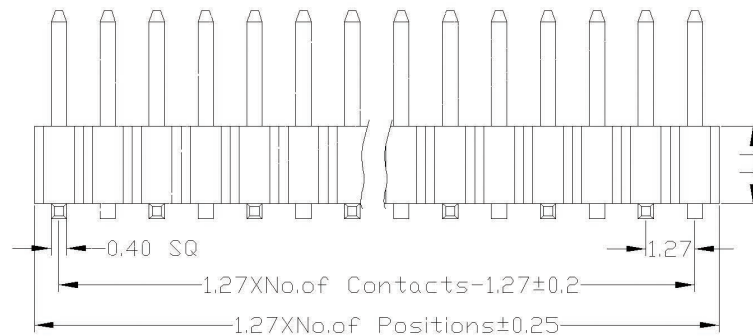

Ordering Information

P1270VS-11 XX XX X XX XXX X X

No.of Pins Per Row 1-50	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U'	Insulatot Material B=BK-PA6T C=BK-PA9T D=BK-LCP	HEIGHT OF HOUSING 161.6mm 20±0.0MM 25±2.54MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray	TYPE1:1 TYPE2:2
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature						



Dimension antitheses list

ITEM	D		B		H		
Standard	0	1	1.2	1.8	3	4	1.6 2 2.54
Alternate							

MATERIAL:	GENERAL TOLERANCE	
UNIT: MM	X. ±0.30	X.* ±2*
SCALE: 3:1	X.X ±0.25	X.X* ±1*
SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN

PART NO: P1270VS-11XXXXXXXXXXXXX
TITLE: 1.27MM 单排针 SMT

ROHS REACH

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 1.0 AMP

Rating Current: 1.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V


Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C


Operation Temperature: -40°C to +105°C

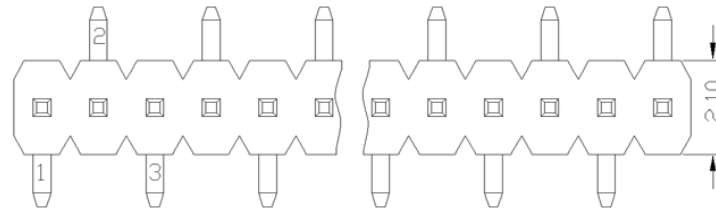

TYPE 1

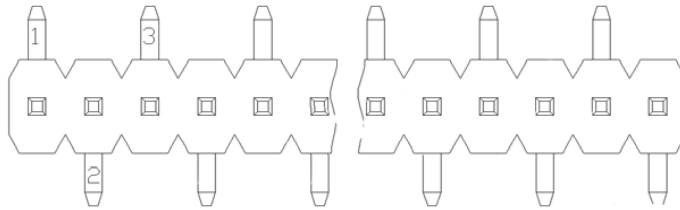


TYPE 2

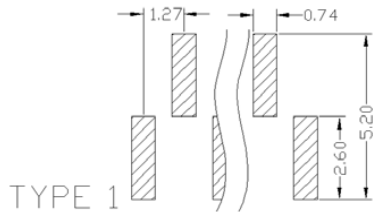

TYPE 1



TYPE 2

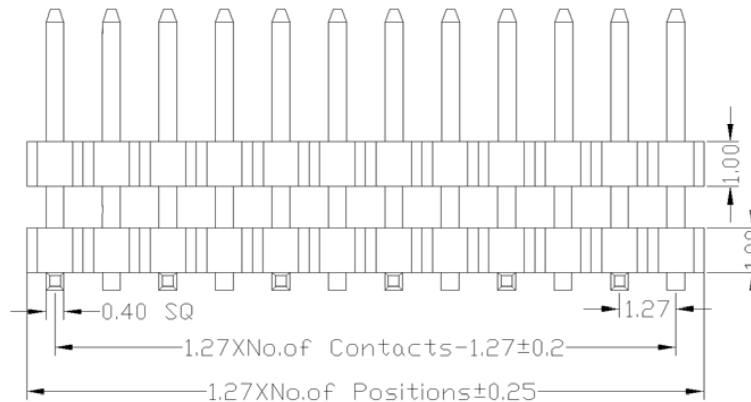


Ordering Information

P1270VS-21 XX XX X 10 XXX X X

No. of Pins Per Row 1-50	Contact Plating Full of Gold	Semi-gold	Insulator Material	HEIGHT OF HOUSING 10±1.0mm	Length of Terminal	Packing Bag	TYPE1: TYPE2:
A0=0.8U'	A1=1U'	B0=0.8U'	B=BK-PA6T			A=PE Bag	
A2=1.5U'	A3=2U'	B0=1.5U'	C=BK-PA9T			C=Tube	
A4=3U'	A5=5U'	B0=2U'	D=BK-LCP			D=Tube+Cap	
A6=10U'	A7=15U'	B0=3U'				E=Tray	
A8=20U'	A9=30U'	B0=5U'					
		B0=10U'					
		B0=15U'					
		B0=20U'					
		B0=30U'					
			S1=Ordinary Tin Plated				
			S2=Matte Tin Plated				
			S3=Tin-platde High-temperature				

Dimension antitheses list

ITEM	D	B	C
Standard	0	1.8	3
Alternate			



				MATERIAL:	GENERAL TOLERANCE		东莞市轩盟电子科技有限公司 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD
REV: A	APPROVE	CHECK	DRAWN	UNIT: MM	X. ±0.30	X.* ±2°	
SHEET: 1/1	FENG	ZENG	LIJIAN	SCALE: 3:1	X.X ±0.25	X.X* ±1°	
				SIZE: A4	X.XX ±0.15		
				PART NO: P1270VS-21XXXXX10XXXXX			TITLE: 1.27MM 单排针 双塑 SMT
				TITLE: 1.27MM 单排针 双塑 SMT			

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 1.0 AMP

Rating Current: 1.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN






Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C


Operation Temperature: -40°C to +105°C

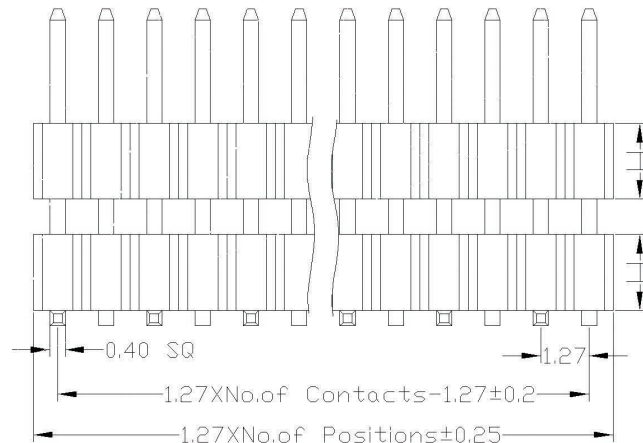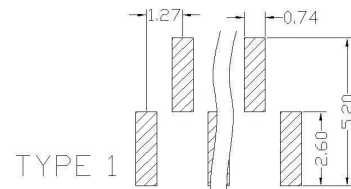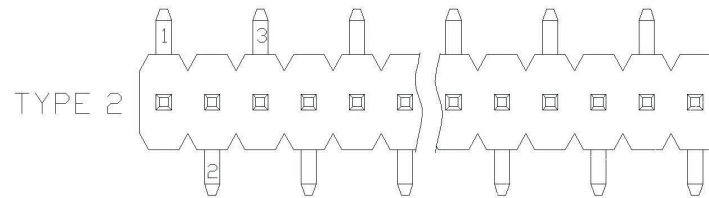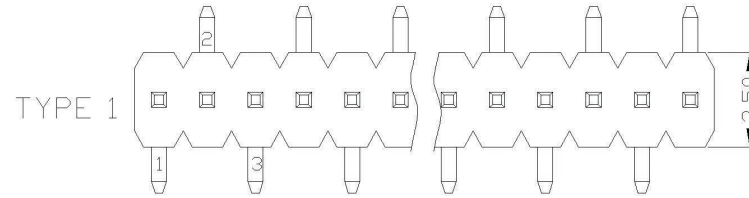

Ordering Information

P1270VS-21 XX XX X XX XXX X X

No. of Pins Per Row 1-50	Contact Plating Full of Gold	Semi-gold	Insulator Material	HEIGHT OF HOUSING	Length of Terminal	Packing	TYPE1:1	TYPE2:2
A0=0.8U'	A1=1U'	A2=1.5U'	B=BK-PA6T	161.6mm		A=PE Bag		
A3=2U'	A4=3U'	A5=5U'	C=BK-PA9T	202.0MM		T=Tape&Reel		
A6=10U'	A7=15U'	A8=20U'	D=BK-LCP	252.54MM		D=Tube+Cap		
A9=30U'	B0=0.8U'	B0=1U'				E=Tray		
	B0=1.5U'	B0=2U'						
	B0=3U'	B0=5U'						
	B0=10U'	B0=15U'						
	B0=20U'	B0=30U'						
	S1=Ordinary Tin Plated							
	S2=Matte Tin Plated							
	S3=Tin-platde High-temperature							

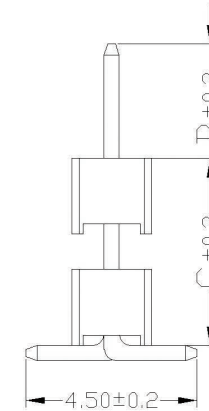

ITEM	D		B		H		C		
Standard	0	1	1.2	1.8	3	4	1.6	2	2.54
Alternate									

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2°
				SCALE: 3:1	X.X ±0.25 X.X* ±1°
				SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1270VS-21XXXXXXXXXXXXX

TITLE: 1.27MM 单排针 双塑 SMT