

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS






备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 3.0 AMP
 Raring Current: 3.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

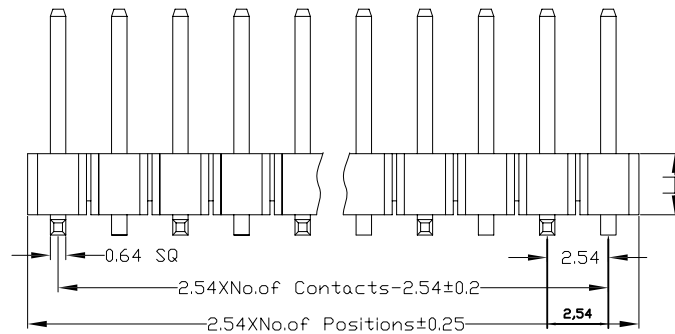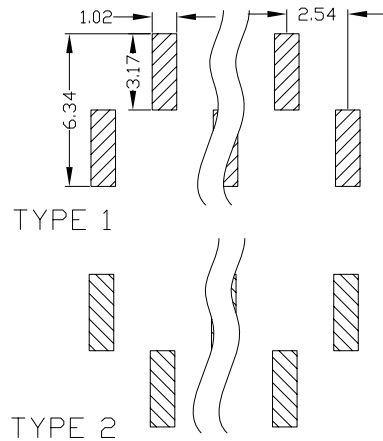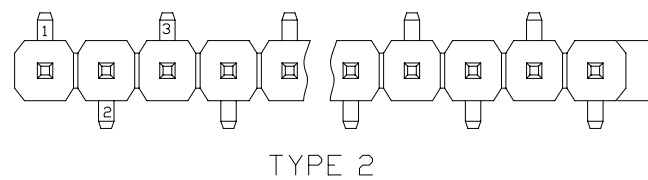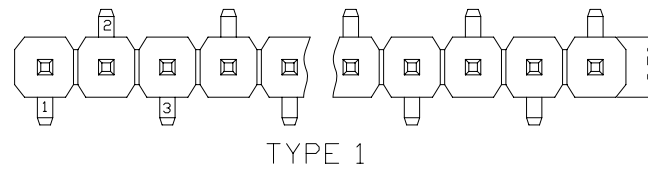

Ordering Information

P2540VS-11 XX XX X XX XXX X X

No. of Pins Per Row 1-40	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U'	Insulatot Material: B:PA6T C:PA9T D:LCP	HEIGHT OF HOUSING 151.5mm 171.7mm 202.0mm 252.54mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray	TYPE1:1 TYPE2:2
--------------------------	--	---	---	--	--------------------	---	-----------------

Dimension antitheses list						
ITEM	B	H		D		
Standard	6	1.5	1.7	2	2.54	0.6 1.2
Alternate						

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2°
				SCALE: 3:1	X.X ±0.25	X.X* ±1°
				SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD
 PART NO: P2540VS-11XXXXXXXXXXXXX
 TITLE: 2.54MM 单排针 SMT

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All







2. 特性 (characteristics):

额定电流: 3.0 AMP
 Raring Current: 3.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

Ordering Information

P2540VS-21 **XX** **XX** **X** **XX** **XXX** **X** **X**

No. of Pins 1-40	Contact Plating Full of Glod	Semi-gold	Insulatot Material B:PA6T C:PA9T DLCP	HEIGHT OF HOUSING 15:1.5mm 17:1.7mm 20:2.0mm 25:2.54mm	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray	TYPE1:1 TYPE2:2
A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'						
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature						

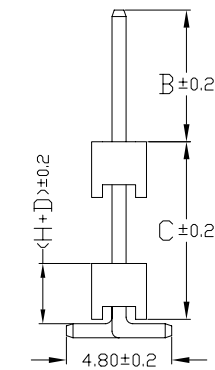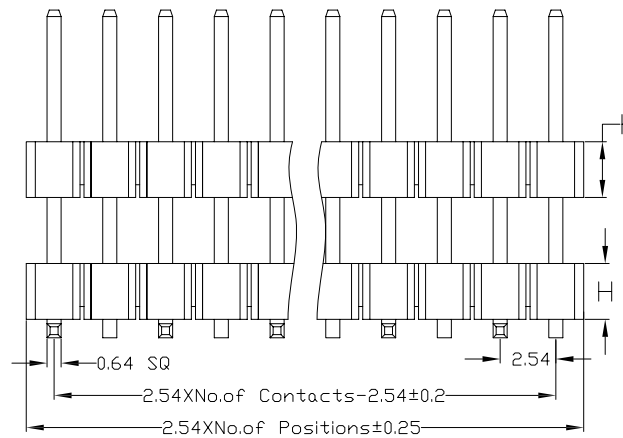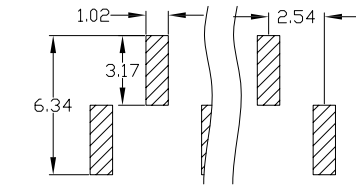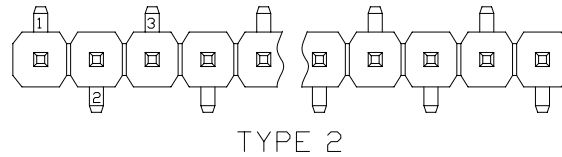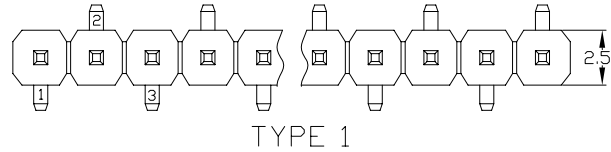

Dimension antitheses list					
ITEM	B	H		D	C
Standard	6	1.5	1.7	2	2.54
Alternat					

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2°
				SCALE: 3:1	X.X ±0.25 X.X* ±1°
				SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P2540VS-21XXXXXXXXXXXXX
 TITLE: 2.54MM 单排针 双塑 SMT