

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色
Housing: LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 镀普通锡

Contact: Brass, ORDINARY TIN PLATED
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 7.0 AMP

Raring Current: 7.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C




Operation Temperature: -40°C to +105°C

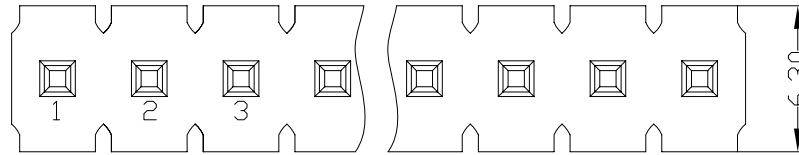

Ordering Information

P3960V-11 XX XX D 32 XXX X 1

No. of Pins Per Row 1-30	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'	Insulator Material: D=LCP	HEIGHT OF HOUSING 32±0.2MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

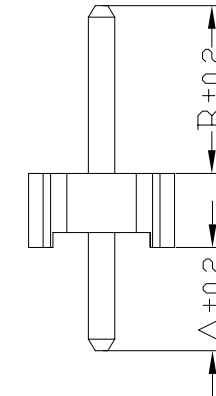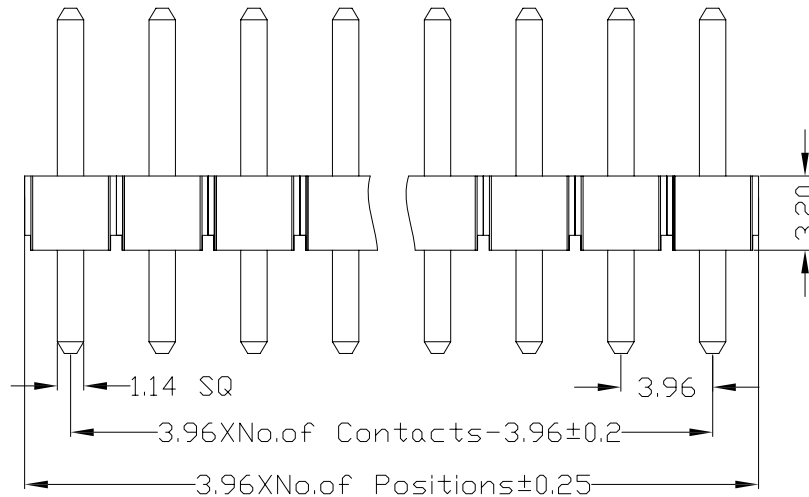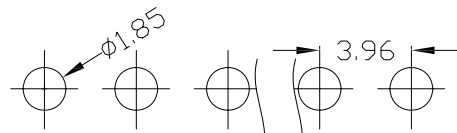

Dimension antitheses list

ITEM	A	B
Standard	2.54	4.5
Alternate		

				MATERIAL:	GENERAL TOLERANCE		东莞市轩盟电子科技有限公司 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD
REV: A	APPROVE	CHECK	DRAWN	UNIT: MM	X. ±0.30	X.* ±2°	
SHEET: 1/1	FENG	ZENG	LIJIAN	SCALE: 3:1	X.X ±0.25	X.X* ±1°	
				SIZE: A4	X.XX ±0.15		
				PART NO: P3960V-11XXXXD32XXXX1			TITLE: 3.96MM 单排针 180°

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL
------------------	------------	---------------------	-----------------

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色
Housing: LCP+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 镀普通锡

Contact: Brass, ORDINARY TIN PLATED
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 7.0 AMP

Raring Current: 7.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C




Operation Temperature: -40°C to +105°C

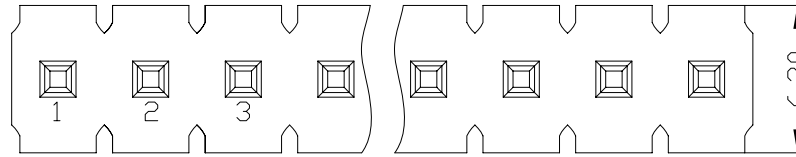

Ordering Information

P3960V-21 XX XX D 32 XXX X 1

No. of Pins 1-30	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'	Insulator Material DLCP	HEIGHT OF HOUSING 32±0.2MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

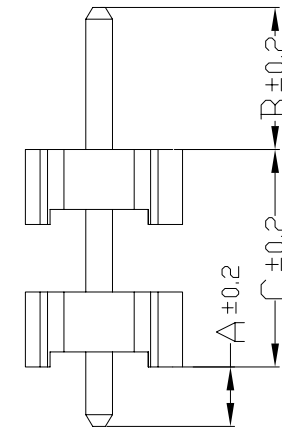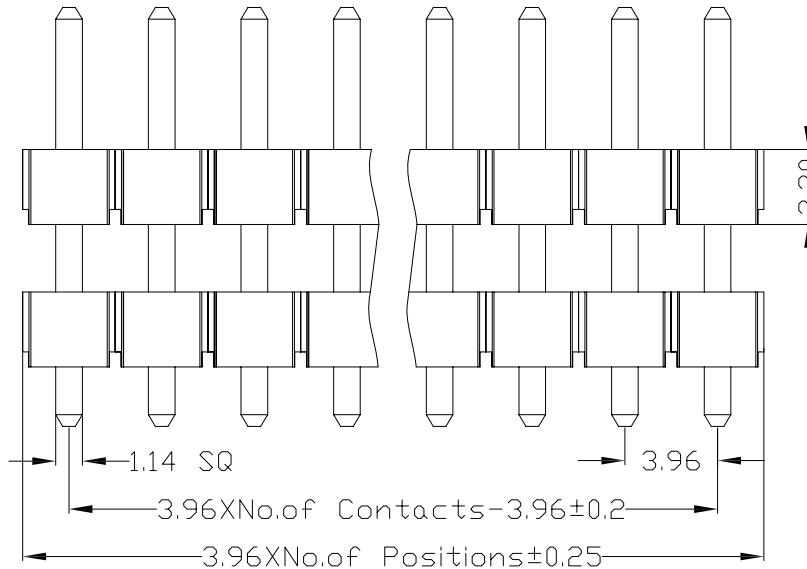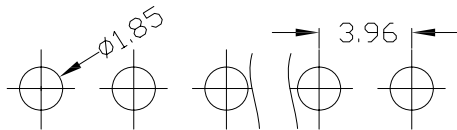

Dimension antitheses list

ITEM	A	B	C
Standard	2.54	4.5	
Alternate			

MATERIAL:

GENERAL TOLERANCE

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN

UNIT: MM

X. ±0.30 X.* ±2°

SCALE: 3:1

X.X ±0.25 X.X* ±1°

SIZE: A4

X.XX ±0.15

PART NO: P3960V-21XXXXD32XXXX1

TITLE: 3.96MM 单排针 双塑 180°