

ROHS REACH

| | | | |
|------------------|------------|---------------------|-----------------|
| | | | |
| | | | |
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVAL |

SPECIFICATIONS


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):




额定电流: 3.0 AMP
 Raring Current: 3.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

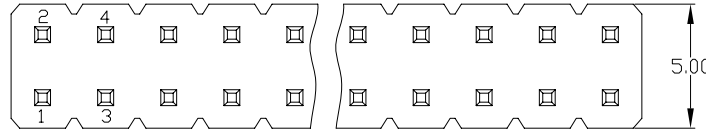

Ordering Information

P2540V-12 XX XX X XX XXX X 1

| No. of Pins Per Row 2-40 | Contact Plating Full of Glod | Semi-gold | Insulatot Material | HEIGHT OF HOUSING | Length of Terminal | Packing |
|--------------------------|------------------------------|--------------------------------|--------------------|-------------------|--------------------|---------|
| A0=0.8U' | B0=0.8U' | A:PA6T | 15±1.5mm | 30±3.0MM | E=Tray | |
| A1=1U' | B0=1U' | B:PA6T | 17±1.7mm | | | |
| A2=1.5U' | B0=1.5U' | C:PA9T | 20±2.0mm | | | |
| A3=2U' | B0=2U' | D:LCP | 25±2.54mm | | | |
| A4=3U' | B0=3U' | | | | | |
| A5=5U' | B0=5U' | | | | | |
| A6=10U' | B0=10U' | | | | | |
| A7=15U' | B0=15U' | | | | | |
| A8=20U' | B0=20U' | | | | | |
| A9=30U' | B0=30U' | | | | | |
| | | S1=Ordinary Tin Plated | | | | |
| | | S2=Matte Tin Plated | | | | |
| | | S3=Tin-platde High-temperature | | | | |

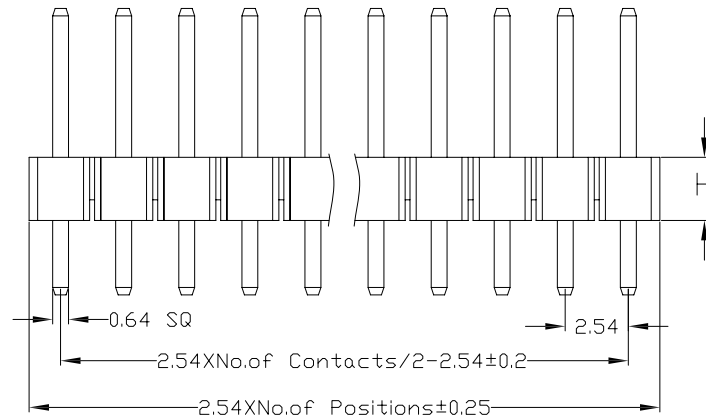

Dimension antitheses list

| ITEM | A | B | H | | | | |
|-----------|---|---|-----|-----|---|------|---|
| Standard | 3 | 6 | 1.5 | 1.7 | 2 | 2.54 | 3 |
| Alternate | | | | | | | |

| | | | | | | |
|-----------|---------|-------|--------|------------|-------------------|----------|
| REV: A | APPROVE | CHECK | DRAWN | MATERIAL: | GENERAL TOLERANCE | |
| SHEET:1/1 | FENG | ZENG | LIJIAN | UNIT: MM | X. ±0.30 | X.* ±2° |
| | | | | SCALE: 3:1 | X.X ±0.25 | X.X* ±1° |
| | | | | SIZE: A4 | X.XX ±0.15 | |

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P2540V-12XXXXXXXXXXXXX1

TITLE : 2.54MM 双排针 180°

ROHS REACH

| | | | |
|------------------|------------|---------------------|-----------------|
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVAL |
|------------------|------------|---------------------|-----------------|

Ordering Information

P2540V-22 XX XX X XX XXX X 1

| | | | | | | |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|---------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------|
| No.of Pins Per Row 2-40 | Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U' | Semi-gold B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U' | Insulator Material: APBT BPA6T CIPA9T DLCP | HEIGHT OF HOUSING 151.5mm 171.7mm 202.0mm 252.54mm 303.0MM | Length of Terminal | Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray |
| | S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature | | | | | |

SPECIFICATIONS





备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN
Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 3.0 AMP
Raring Current: 3.0 AMP
接触阻抗: 20MΩ MAX
Contact Resistance: 20mΩ Max
绝缘阻抗: 1000MΩ MIN
Insulation Resistance: 1000MΩ Min
耐电压: AC 500V
Withstand Voltage: 500V AC/DC
温度范围: -40°C to +105°C
Operation Temperature: -40°C to +105°C

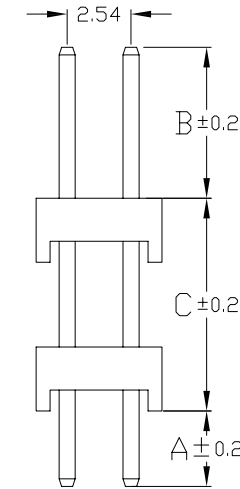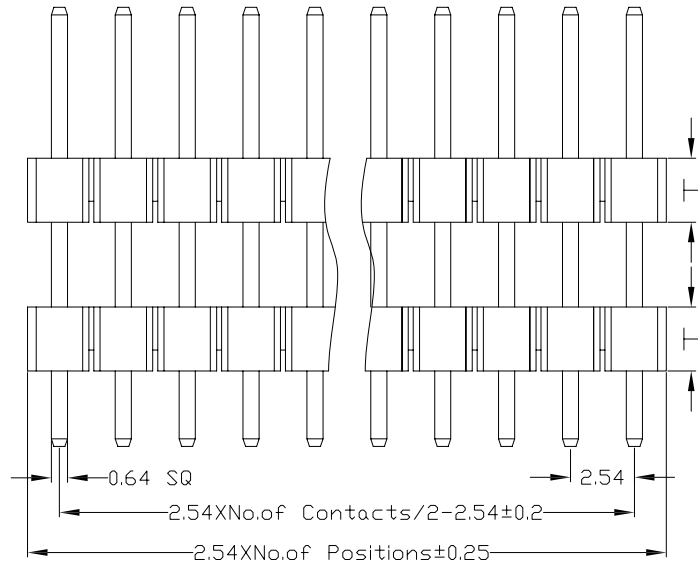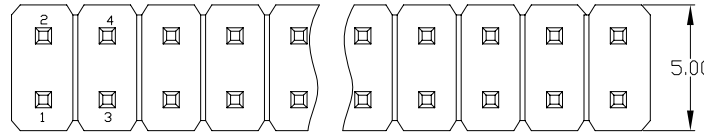

| ITEM | A | B | H | | | C | |
|-----------|---|---|-----|-----|---|------|---|
| Standard | 3 | 6 | 1.5 | 1.7 | 2 | 2.54 | 3 |
| Alternate | | | | | | | |

| | | | | | | |
|-----------|---------|-------|--------|------------|-------------------|----------|
| REV: A | APPROVE | CHECK | DRAWN | MATERIAL: | GENERAL TOLERANCE | |
| SHEET:1/1 | FENG | ZENG | LIJIAN | UNIT: MM | X. ±0.30 | X.* ±2* |
| | | | | SCALE: 3:1 | X.X ±0.25 | X.X* ±1* |
| | | | | SIZE: A4 | X.XX ±0.15 | |

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P2540V-22XXXXXXXXXXXXX1

TITLE : 2.54MM 双排针 双塑 180°