

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL
------------------	------------	---------------------	----------------

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色
Housing: LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30U"MIN, 镀普通锡

Contact: Brass, ORDINARY TIN PLATED

30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 7.0 AMP

Raring Current: 7.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN



Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C


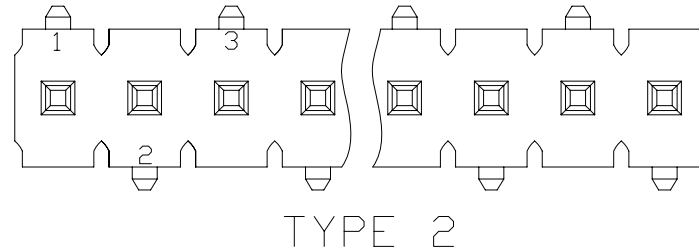
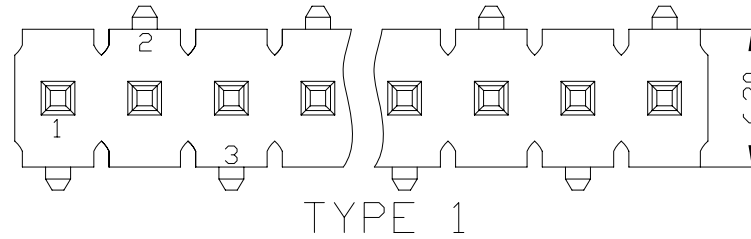


Ordering Information

P3960VS-11 XX XX D 32 XXX X X

No. of Pins Per Row 1-30	Contact Plating Full of Glod A0=0.8U" A1=1U" A2=1.5U" A3=2U" A4=3U" A5=5U" A6=10U" A7=15U" A8=20U" A9=30U"	Semi-gold B0=0.8U" B0=1.5U" B0=2U" B0=3U" B0=5U" B0=10U" B0=15U" B0=20U" B0=30U"	Insulatot Material DLCP	HEIGHT OF HOUSING 32±3.2MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray	TYPE1: TYPE2:2
--------------------------------	---	---	----------------------------	-------------------------------	--------------------	--	-------------------

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-platde High-temperature

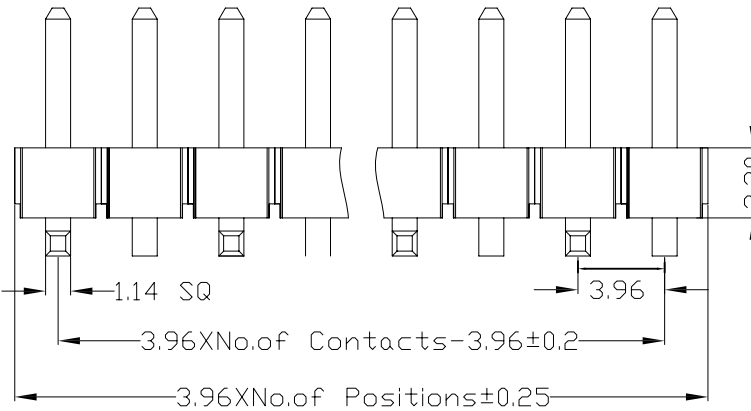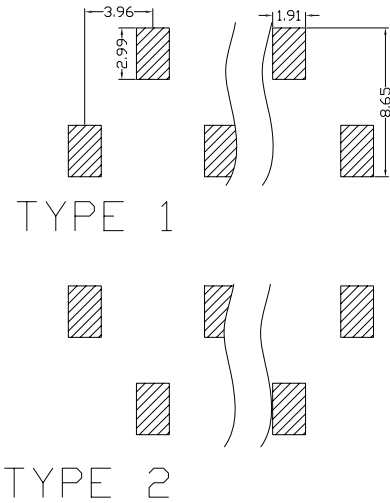

Dimension antitheses list			
ITEM	W	B	D
Standard	8.4	4.5	0.6
Alternate			

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2°
				SCALE: 3:1	X.X ±0.25 X.X* ±1°
				SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P3960VS-11XXXXD32XXXXX

TITLE: 3.96MM 单排针 SMT

ROHS REACH

日期版次	日期	变更内容	核准
REVISION	DATE	DESCRIPTION	APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色
Housing: LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 镀普通锡

Contact: Brass, ORDINARY TIN PLATED

30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 7.0 AMP

Raring Current: 7.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V


Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C

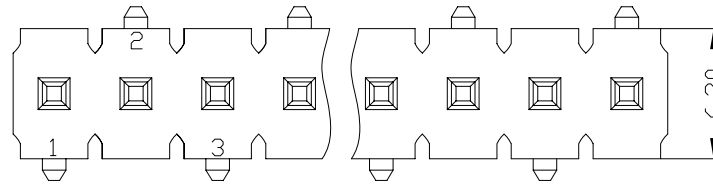

TYPE 1

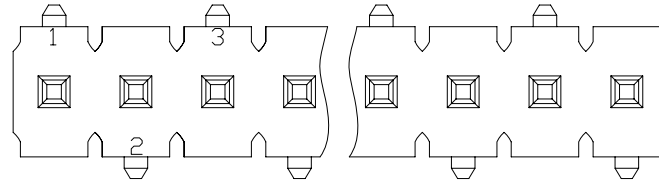


TYPE 2


Ordering Information

P3960VS-21 **XX** **XX** **D** **32** **XXX** **X** **X**



No. of Pins Per Row 1-30	Contact Plating Full of Glod	Semi-gold	Insulator Material	HEIGHT OF HOUSING	Length of Terminal	Packing Bag	TYPE1: TYPE2:
A0=0.8U'	A1=1U'	B0=0.8U'	D=LCP	32±0.2MM		A=PE Bag	
A2=1.5U'	A3=2U'	B0=1.5U'				T=Tape&Reel	
A4=3U'	A5=5U'	B0=2U'				C=Tube	
A6=10U'	A7=15U'	B0=3U'				D=Tube+Cap	
A8=20U'	A9=30U'	B0=5U'				E=Tray	
		B0=10U'					
		B0=15U'					
		B0=20U'					
		B0=30U'					
			S1=Ordinary Tin Plated				
			S2=Matte Tin Plated				
			S3=Tin-platde High-temperature				



TYPE 1



TYPE 2

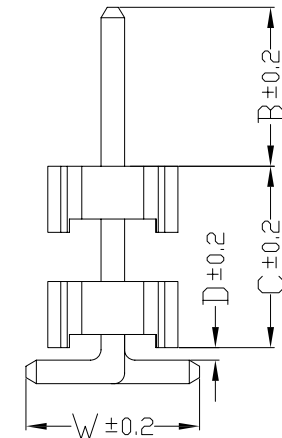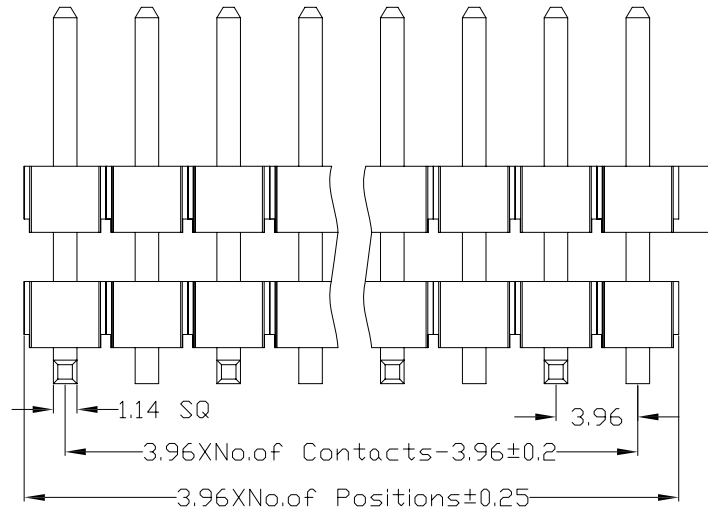

Dimension antitheses list

ITEM	W	B	D	C
Standard	8.4	4.5	0.6	
Alternate				

MATERIAL:

GENERAL TOLERANCE

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

REV: A APPROVE CHECK DRAWN

UNIT: MM

X. ±0.30 X.* ±2*

SHEET:1/1 FENG ZENG LIJIAN

SCALE: 3:1

X.X ±0.25 X.X.* ±1*

PART NO: P3960VS-21XXXXD32XXXXX

SIZE: A4

X.XX ±0.15

TITLE: 3.96MM 单排针 双塑 SMT