

ROHS REACH

日期版次	日期	变更内容	核准
REVISION	DATE	DESCRIPTION	APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30U"MIN, 表面镀金0.8U"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 3.0 AMP

Raring Current: 3.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C




Operation Temperature: -40°C to +105°C

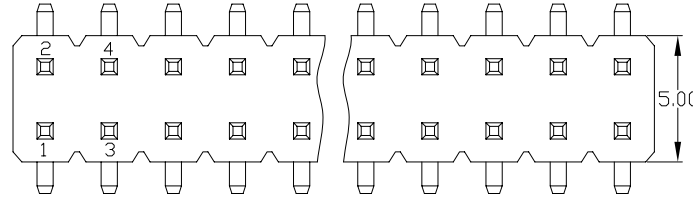

Ordering Information

P2540VS-12 XX XX X XX XXX X 1

No. of Pins Per Row 2-40	Contact Plating Full of Gold	Semi-gold	Insulator Material	HEIGHT OF HOUSING	Length of Terminal	Packing
A0=0.8U'	B0=0.8U'	B1=1U'	B1=1U'	15±1.5mm	17±1.7mm	A=PE Bag
A1=1U'	B0=1U'	B0=1.5U'	B0=1.5U'	20±2.0mm	25±2.54mm	T=Tape&Reel
A2=1.5U'	B0=2U'	B0=3U'	B0=3U'	30±3.0MM		C=Tube
A3=2U'	B0=2U'	B0=5U'	B0=5U'			D=Tube+Cap
A4=3U'	B0=3U'	B0=10U'	B0=10U'			E=Tray
A5=5U'	B0=5U'	B0=15U'	B0=15U'			
A6=10U'	B0=10U'	B0=20U'	B0=20U'			
A7=15U'	B0=15U'	B0=30U'	B0=30U'			
A8=20U'	B0=20U'					
A9=30U'	B0=30U'					
	S1=Ordinary Tin Plated					
	S2=Matte Tin Plated					
	S3=Tin-platde High-temperature					

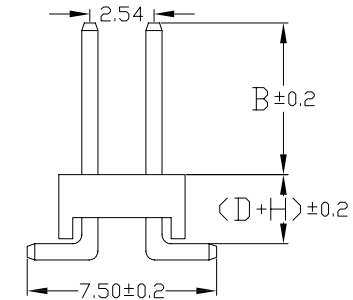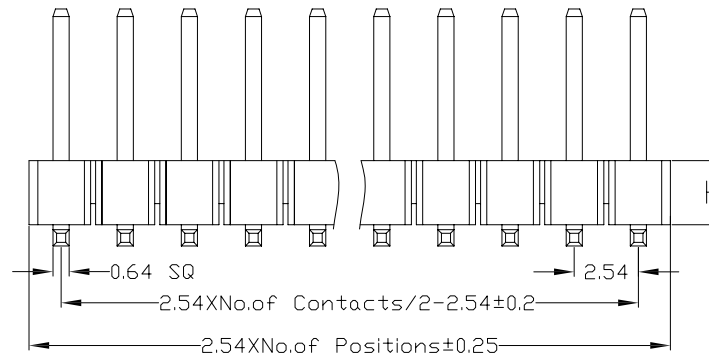

Dimension antitheses list

ITEM	B	H			D			
Standard	6	1.5	1.7	2	2.54	3	0.2	0.6
Alternate								

MATERIAL:	GENERAL TOLERANCE	
UNIT: MM	X. ±0.30	X.* ±2*
SCALE: 3:1	X.X ±0.25	X.X* ±1*
SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P2540VS-12XXXXXXXXXXXXX1

TITLE: 2.54MM 双排针 SMT

REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL
------------------	------------	---------------------	----------------

SPECIFICATIONS




备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (characteristics):


额定电流: 3.0 AMP
 Raring Current: 3.0 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40°C to +105°C
 Operation Temperature: -40°C to +105°C

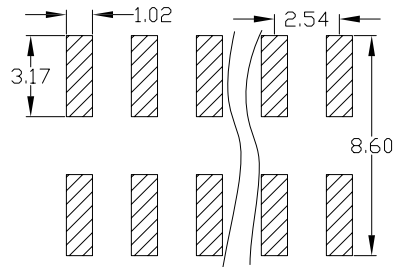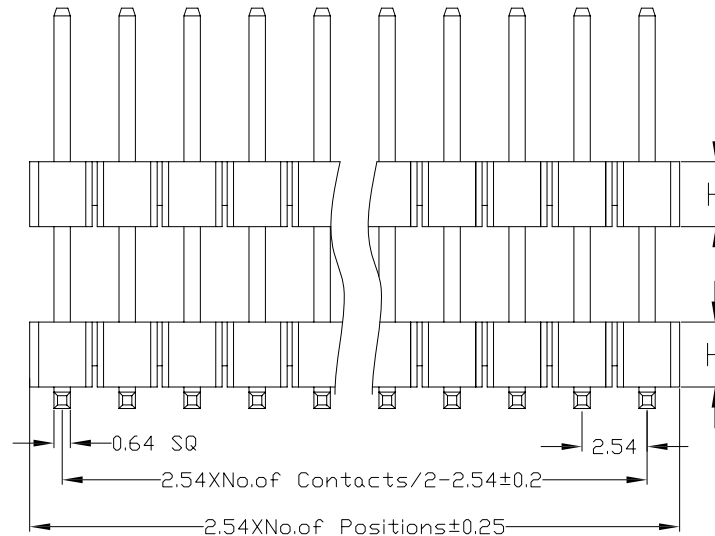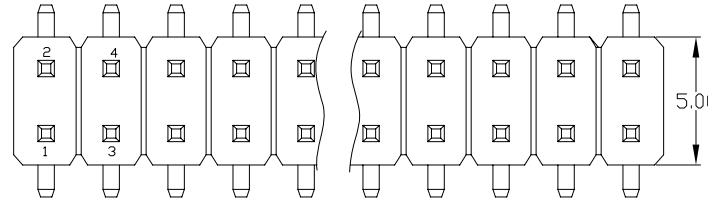

Ordering Information

P2540VS-22 XX XX X XX XXX X 1

No. of Pins Per Row 2-40	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'	Insulatot Material: B:PA6T C:PA9T D:LCP	HEIGHT OF HOUSING 15±1.5mm 17±1.7mm 20±2.0mm 25±2.54mm 30±3.0MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

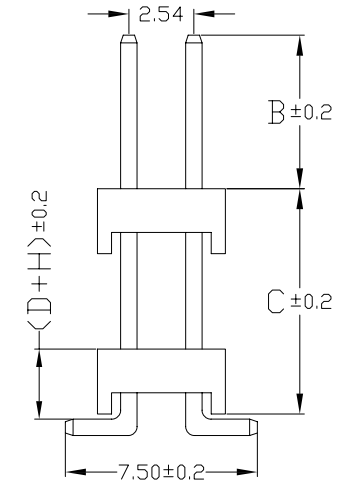

Dimension antitheses list						
ITEM	B	H			D	C
Standard	6	1.5	1.7	2	2.54	3
Alternate						

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2*
				SCALE: 3:1	X.X ±0.25	X.X* ±1*
				SIZE: A4	X.XX ±0.15	

YSTZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P2540VS-22XXXXXXXXXXXXX1

TITLE : 2.54MM 双排针 双塑 SMT