

ROHS REACH

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G, F UL94V-0, 颜色: 黑色
Housing: LCP+30%G, F UL94V-0, Color: Black
四方针: 黄铜, 铆底30U"MIN, 镀普通锡
Contact: Brass, ORDINARY TIN PLATED
30u" min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 7.0 AMP

额定电流: 7.0 AMP

接触电阻: 20M Ω MAX

绝缘电阻: 1000M Ω MIN

绝缘电阻: 1000M Ω Min


耐压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40℃ to +105℃

温度范围: -40℃ to +105℃




Operation Temperature: -40℃ to +105℃

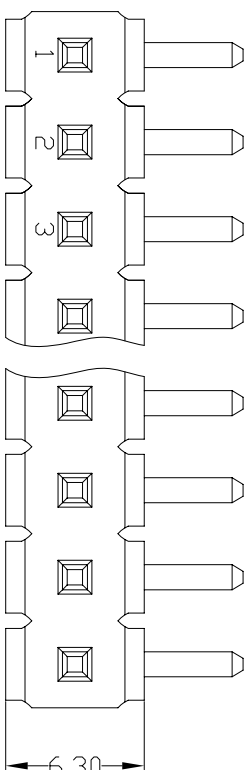

Ordering Information

P3960R-11 XX XX D 32 XXX X 1

No of Pins Per Row	1-30	Contact Plating	Full of Gold	Semi-gold	Insulator Material	HEIGHT OF HOUSING	Length of Terminal	Packing of Big
			A1=0.8U'	B0=0.8U'	DILCP	3.3/3.2MM		A=PE Bag
			A1=1U'	B0=1U'				T=Tape&Reel
			A2=1.5U'	B0=1.5U'				C=Tube
			A3=2U'	B0=2U'				D=Tube+Cap
			A4=3U'	B0=3U'				E=Trey
			A5=5U'	B0=5U'				
			A6=10U'	B0=10U'				
			A7=15U'	B0=15U'				
			A8=20U'	B0=20U'				
			A9=30U'	B0=30U'				
			S1=Ordinary Tin Plated					
			S2=Katte Tin Plated					
			S3=Tin-plate High-temperature					

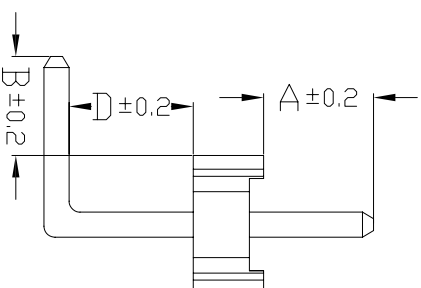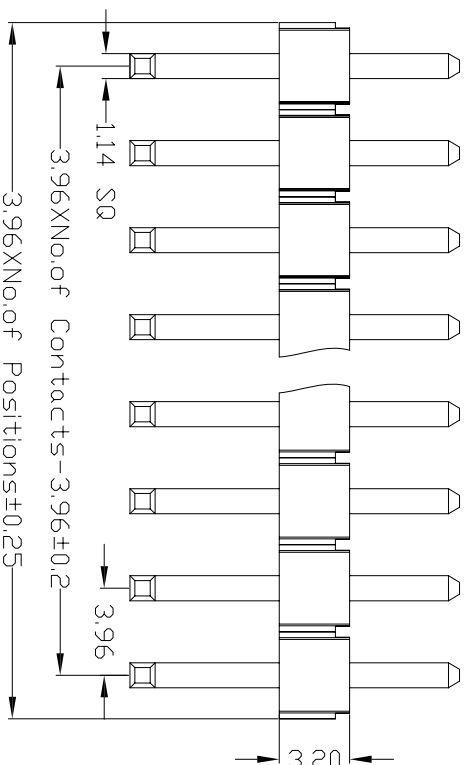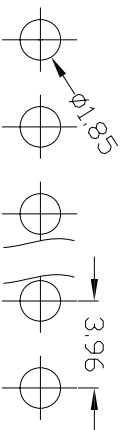

Dimension antitheses list

ITEM	A	B	D
Standard	2.54	4.5	0.6
Alternaate			5.65

YSZ 东莞市轩盟电子科技有限公司

DONGGUAN YSZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P3960R-11XXXXD32XXXXX1

TITLE : 3.96MM 单排针 90°

APPROVE

CHECK

DRAWN

MATERIAL:

GENERAL TOLERANCE

UNIT: MM X. ±0.30 X.* ±2°

SCALE: 3:1

XX ±0.25 XX.* ±1°

SIZE: A4

XXX ±0.15

REV: A

FENG

ZENG

LIJIAN

SIZE: A4

XXX ±0.15

TITLE : 3.96MM 单排针 90°

单排针 90°

A

B

C

D

E

F

6

5

4

3

2

1

A

日期版次	日期	变更内容	核准
REVISION	DATE	DESCRIPTION	APPROVAL BY