

ROHS REACH

日期版次	日期	变更内容	核准
REVISION	DATE	DESCRIPTION	APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色
Housing: LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 镀普通锡

Contact: Brass, ORDINARY TIN PLATED
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 7.0 AMP

Raring Current: 7.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C



Operation Temperature: -40°C to +105°C

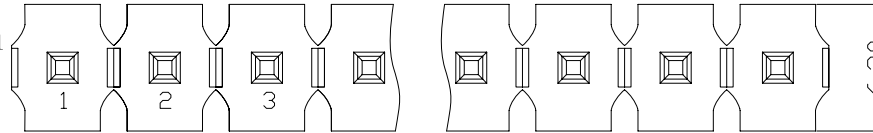

Ordering Information

P5080V-11 XX XX D 25 XXX X 1

No. of Pins Per Row 1-20	Contact Plating Full of Glod	Semi-gold	Insulatot Material: DLCP	HEIGHT OF HOUSING 25±2.5MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
A0=0.8U'	B0=0.8U'					
A1=1U'	B0=1U'					
A2=1.5U'	B0=1.5U'					
A3=2U'	B0=2U'					
A4=3U'	B0=3U'					
A5=5U'	B0=5U'					
A6=10U'	B0=10U'					
A7=15U'	B0=15U'					
A8=20U'	B0=20U'					
A9=30U'	B0=30U'					
	S1=Ordinary Tin Plated					
	S2=Matte Tin Plated					
	S3=Tin-platde High-temperature					

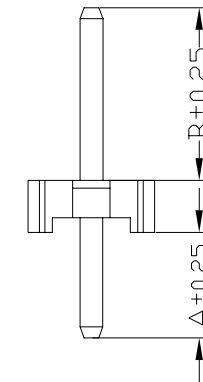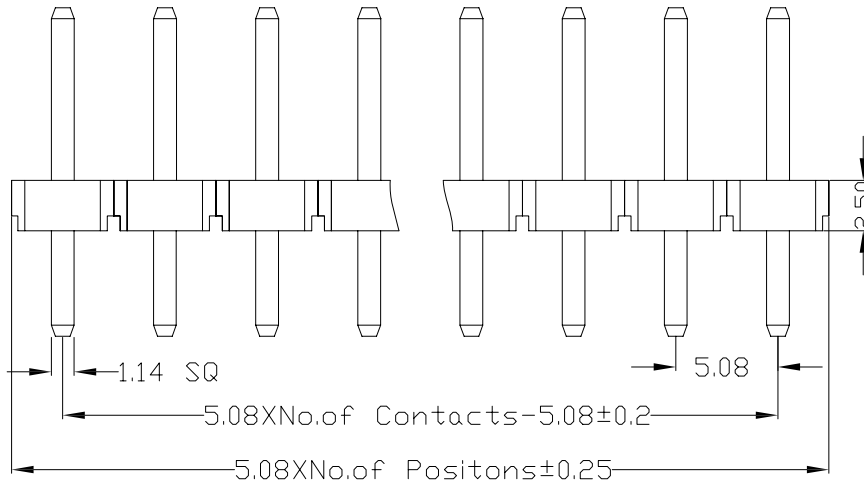

Dimension antitheses list

ITEM	A	B
Standard	2.54	4.5 15
Alternate		

MATERIAL:	GENERAL TOLERANCE
UNIT: MM	X. ±0.30 X.* ±2°
SCALE: 3:1	X.X ±0.25 X.X* ±1°
SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN

PART NO: P5080V-11XXXXD25XXXX1
TITLE: 5.08MM 单排针 180°

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS

备注 (Remark)


1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色
Housing: LCP+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 镀普通锡
Contact: Brass, ORDINARY TIN PLATED

30u"min Nickel Underplating Over All

2. 特性 (characteristics):



额定电流: 7.0 AMP
Raring Current: 7.0 AMP
接触阻抗: 20MΩ MAX
Contact Resistance: 20mΩ Max
绝缘阻抗: 1000MΩ MIN
Insulation Resistance: 1000MΩ Min
耐电压: AC 500V
Withstand Voltage: 500V AC/DC
温度范围: -40°C to +105°C
Operation Temperature: -40°C to +105°C

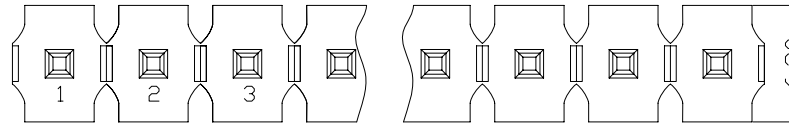

Ordering Information

P5080V-21 XX XX D 25 XXX X 1

No. of Pins Per Row 1-20	Contact Plating Full of Glod	Semi-gold	Insulatot Material: DLCP	HEIGHT OF HOUSING 25±2.5MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	B0=0.8U' B0=1U' B0=1.5U' B0=2U' B0=3U' B0=5U' B0=10U' B0=15U' B0=20U' B0=30U'					
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

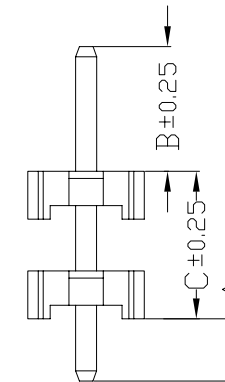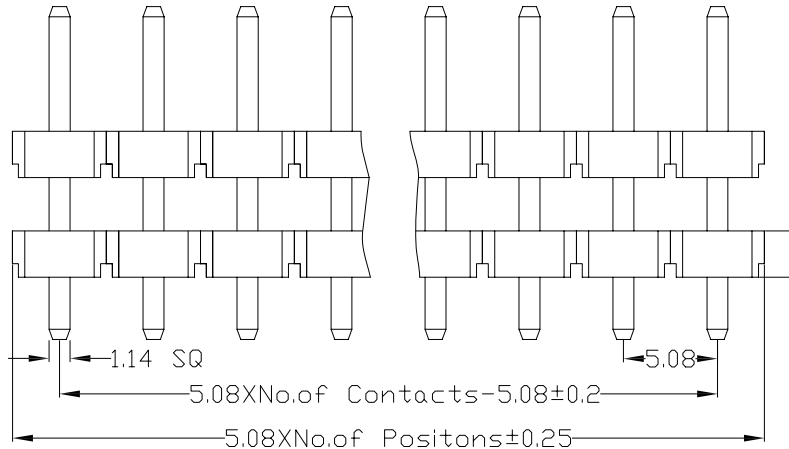

Dimension antitheses list

ITEM	A	B	C
Standard	2.54	4.5	15
Alternate			

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2°
				SCALE: 3:1	X.X ±0.25 X.X* ±1°
				SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P5080V-21XXXXD25XXXX1
TITLE: 5.08MM 单排针 双塑 180°