

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"min Gold Plating Over All
30u"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 3.0 AMP

Raring Current: 3.0 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN


Insulation Resistance: 1000MΩ Min

耐电压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40°C to +105°C




Operation Temperature: -40°C to +105°C

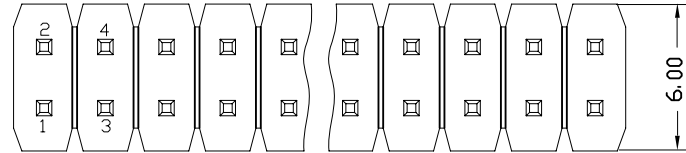

Ordering Information

P2540RS-12 XX XX X XX XXX X 1

No. of Pins Per Row 1-40	Contact Plating Full of Glod	Semi-gold	Insulatot Material	HEIGHT OF HOUSING	Length of Terminal	Packing
A0=0.8U'	A1=1U'	B0=0.8U'	B=PA6T	161.6MM	20±2.0mm	A=PE Bag
A2=1.5U'	A3=2U'	B0=1.5U'	C=PA9T	25±2.54mm		T=Tape&Reel
A4=3U'	A5=5U'	B0=3U'	D=LCP			C=Tube
A6=10U'	A7=15U'	B0=5U'				D=Tube+Cap
A8=20U'	A9=30U'	B0=10U'				E=Tray
		B0=15U'				
		B0=20U'				
		B0=30U'				
			S1=Ordinary Tin Plated			
			S2=Matte Tin Plated			
			S3=Tin-platde High-temperature			

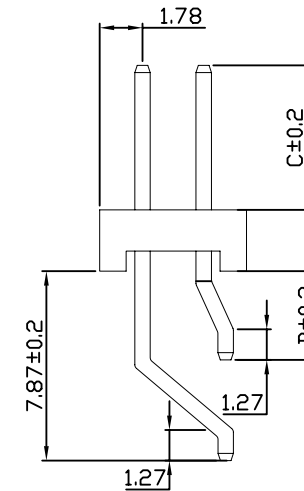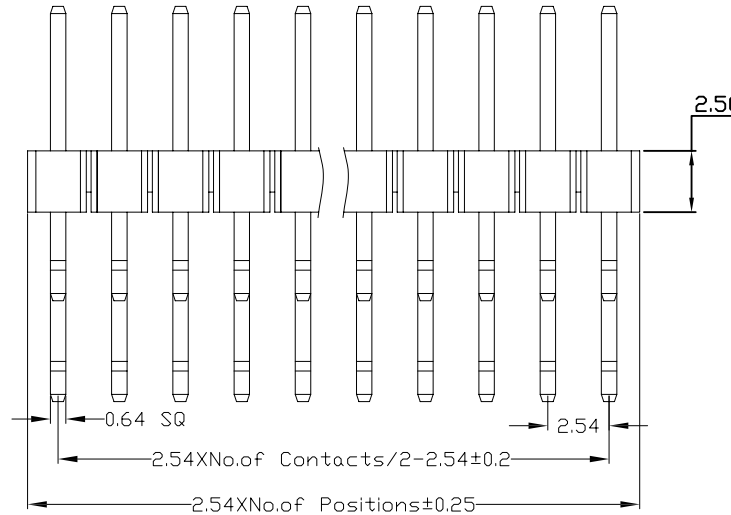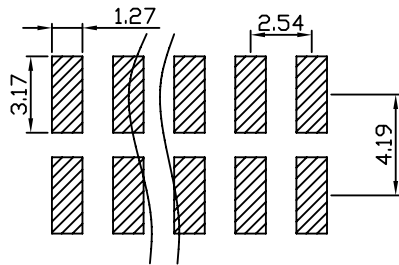

Dimension antitheses list		
ITEM	B	C
Standard	3.68	6
Alternate		

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2*
				SCALE: 3:1	X.X ±0.25 X.X* ±1*
				SIZE: A4	X.XX ±0.15

YSTZ 东莞市轩盟电子科技有限公司
DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P2540RS-12XXXXXXXXXXXXX1

TITLE : 2.54MM 双排针 卧式SMT