

ROHS REACH

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色
Housing: LCP+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 镀普通锡
Contact: Brass, ORDINARY TIN PLATED
30u"min Nickel Underplating Over All




2. 特性 (characteristics):

额定电流: 7.0 AMP
Raring Current: 7.0 AMP
接触阻抗: 20MΩ MAX
Contact Resistance: 20mΩ Max
绝缘阻抗: 1000MΩ MIN
Insulation Resistance: 1000MΩ Min
耐电压: AC 500V
Withstand Voltage: 500V AC/DC
温度范围: -40°C to +105°C
Operation Temperature: -40°C to +105°C

Ordering Information

P5080R-11 XX XX D 25 XXX X 1

No. of Pins Per Row 1-20	Contact Plating Full of Glod A0=0.8U' A1=1U' A2=1.5U' A3=2U' A4=3U' A5=5U' A6=10U' A7=15U' A8=20U' A9=30U'	Semi-gold B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U'	Insulatot Material: DLCP	HEIGHT OF HOUSING 25±2.5MM	Length of Terminal	Packing A=PE Bag T=Tape&Reel C=Tube D=Tube+Cap E=Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-platde High-temperature					

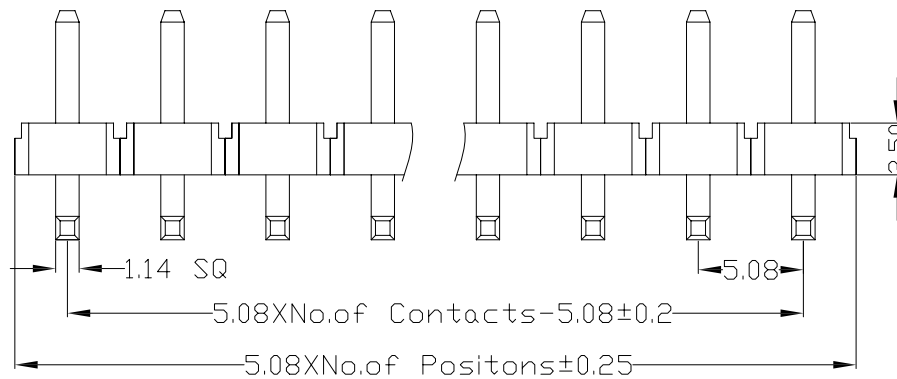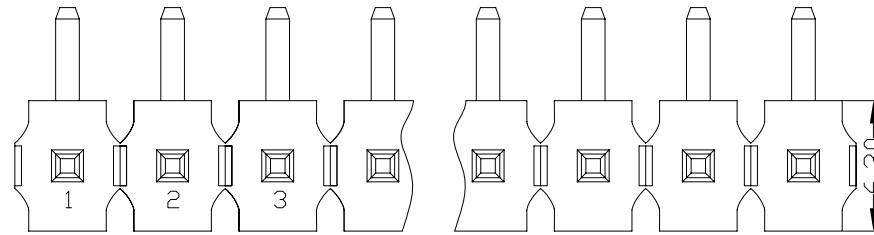

Dimension antitheses list

ITEM	A	B	D
Standard	2.54	4.5	15 0.5 2
Alternat			

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL TOLERANCE	东莞市轩盟电子科技有限公司 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD PART NO: P5080R-11XXXXD25XXXX1 TITLE : 5.08MM 单排针 90°
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30 X.* ±2°	
				SCALE: 3:1	X.X ±0.25 X.X* ±1°	
				SIZE: A4	X.XX ±0.15	