

ROHS REACH

日期版本	日期	变更内容	核准
REVISION	DATE	DESCRIPTION	APPROVAL BY

SPECIFICATIONS

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 铆底30U"MIN, 表面镀金0.8U"MIN

Contact: Brass, 0.8U"min Gold Plating Over All

30U"min Nickel Underplating Over All

2. 特性 (characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP

接触阻抗: 20MΩ MAX

Contact Resistance: 20mΩ Max

绝缘阻抗: 1000MΩ MIN




Insulation Resistance: 1000MΩ Min

耐压: AC 500V

Withstand Voltage: 500V AC/DC

温度范围: -40℃ to +105℃

Operation Temperature: -40℃ to +105℃

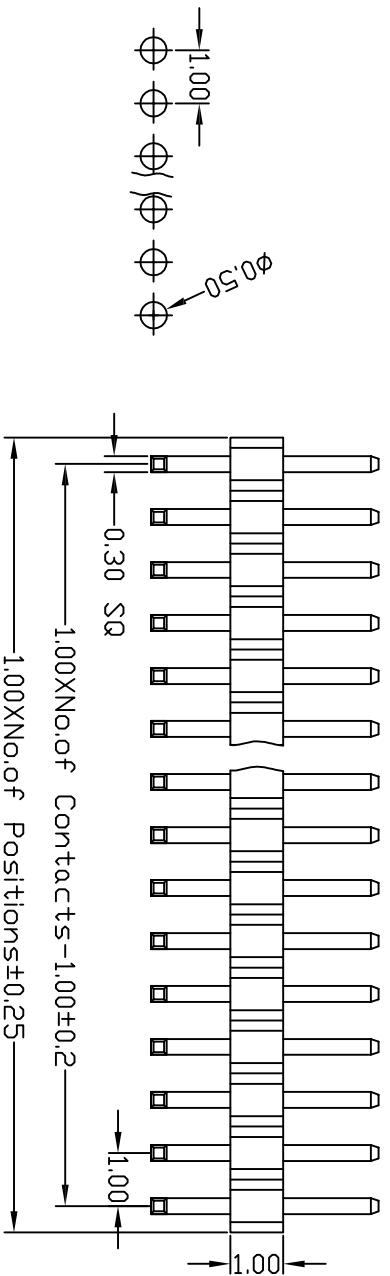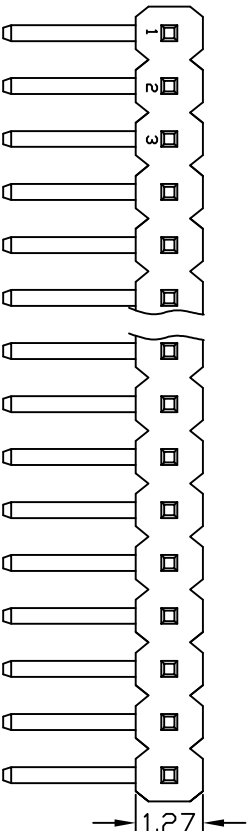

Dimension antitheses List

ITEM	A	B	H	D
Standard	1.8	1.8	2.5	1
Alternate				1.5
				2.1
				1.2

YSITZ 东莞市轩盟电子科技有限公司
DONGGUAN YSITZ ELECTRONIC TECHNOLOGY CO.,LTD

REV: A	APPROVE	CHECK	DRAWN	MATERIAL:	GENERAL	TOLERANCE	PART NO:
SHEET:1/1	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2*	P1000WR-N-00-XXXX
				SCALE: 3:1	X.X ±0.25	X.X* ±1*	TITLE: 1.00MM 单排针 塑高1.0 90度 DIP
				SIZE: A4	X.XX ±0.15		

A	5	4	3	2	1
---	---	---	---	---	---