

ROHS REACH

SPECIFICATIONS


备注 (Remark)

1. 材料 (MATERIAL)


胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镀底30U"MIN, 表面镀金0.8U"MIN
 Contact: Brass, 0.8u"min Gold Plating Over All
 30u"min Nickel Underplating Over All

2. 特性 (Characteristics):




额定电流: 0.75 AMP
 Rering Current: 0.75 AMP
 接触阻抗: 20MΩ MAX
 Contact Resistance: 20mΩ Max
 绝缘阻抗: 1000MΩ MIN
 Insulation Resistance: 1000MΩ Min
 耐电压: AC 500V
 Withstand Voltage: 500V AC/DC
 温度范围: -40℃ to +105℃
 Operation Temperature: -40℃ to +105℃

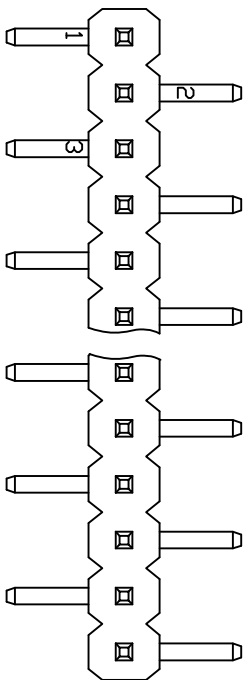

TYPE 1

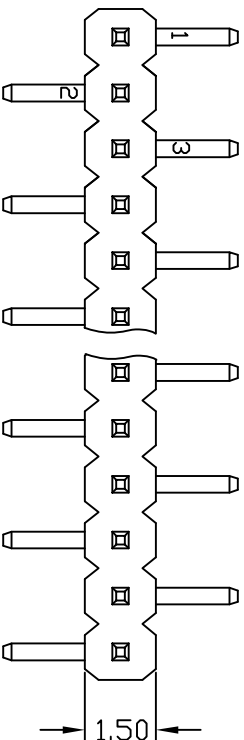

TYPE 2

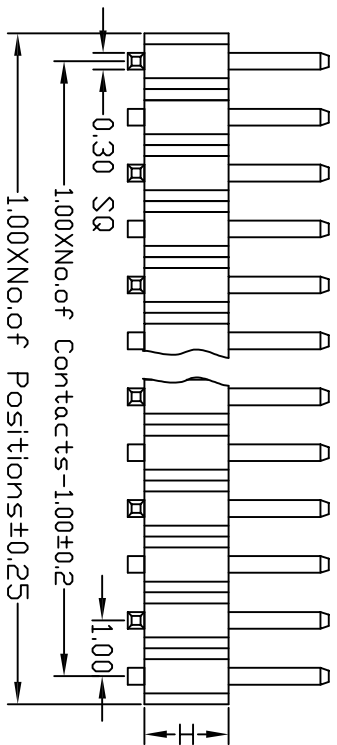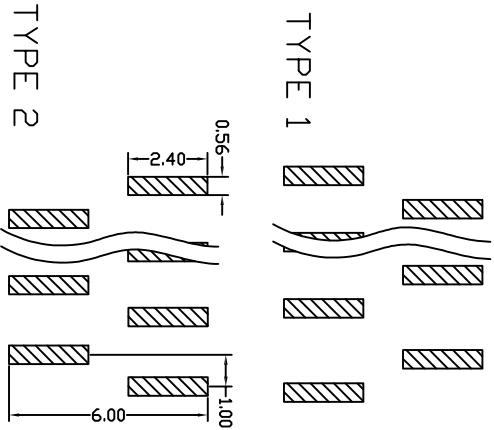

Dimension antitheses list				
ITEM	B	D	H	
Standard	1.8	0	1	1.5
Alternate				

YSITZ 东莞市轩盟电子科技有限公司
 DONGGUAN YSITZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: P1000WV-N-02-XXXX

TITLE: 1.00MM 单排针 塑高1.5 180度 SMT

REVISON	DATE	变更内容	核准

REV:	APPROVE	CHECK	DRAWN	MATERIAL:	GENE AL	TOLERANCE	PART NO:	TITLE:
A	FENG	ZENG	LIJIAN	UNIT: MM	X. ±0.30	X.* ±2*	P1000WV-N-02-XXXX	1.00MM 单排针 塑高1.5 180度 SMT
SHEET:1/1	5			SCALE: 3:1	X.X ±0.25	X.X* ±1*	2	
5				SIZE: A4	X.XX ±0.15	±0.1	1	