
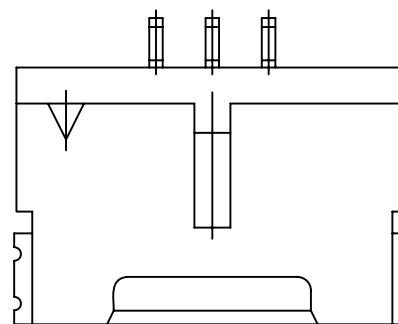
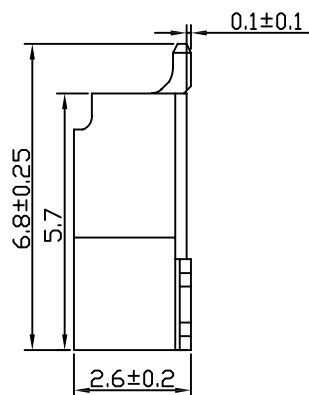


# ROHS REACH

日期版次	日期	变更内容	核 准
REVISION	DATE	DESCRIPTION	APPROVALBY


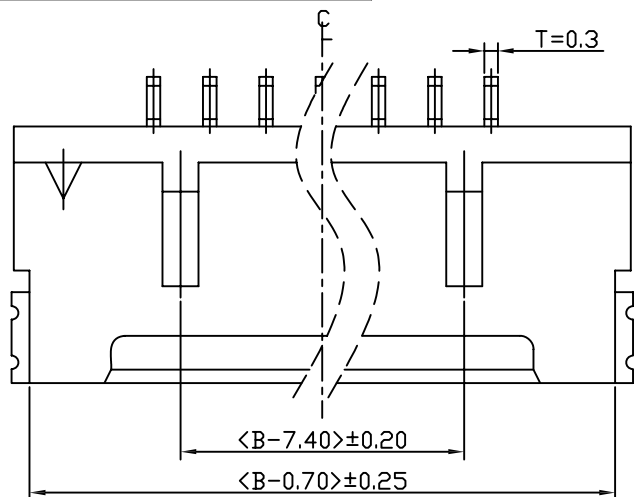


3 Pin

NOTES:

CURRENT RATING: 1A AC/DC.  
 VOLTAGE RATING: 250 V AC/DC.  
 TEMPERATURE RANGE: -25°C~+85°C.  
 CONTACT RESISTANCE: 20mΩ MAX.  
 INSULATION RESISTANCE: 1000 MΩ MIN.  
 WITHSTANDING VOLTAGE: 500V AC/MINUTE.

Recommended P.C.B Layout  
 P.C.B Thickness = 1.20-1.60mm (Tolerance=±0.05)

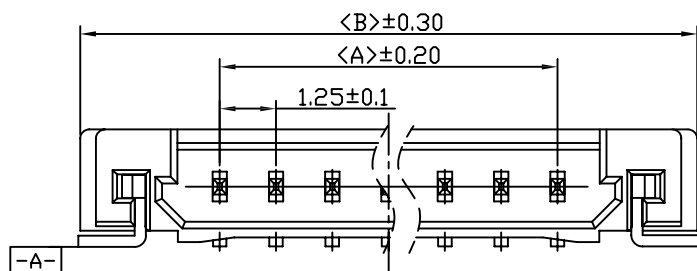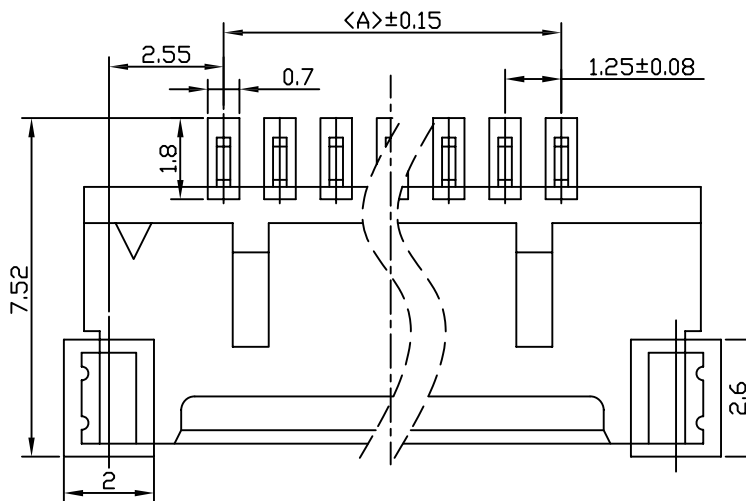

poles	part no	dimensions (mm)	
		A	B
2	A1253RS-2P	1.25	7.45
3	A1253RS-3P	2.50	8.70
4	A1253RS-4P	3.75	9.95
5	A1253RS-5P	5.00	11.20
6	A1253RS-6P	6.25	12.45
7	A1253RS-7P	7.50	13.70
8	A1253RS-8P	8.75	14.95
9	A1253RS-9P	10.00	16.20
10	A1253RS-10P	11.25	17.45
11	A1253RS-11P	12.50	18.70
12	A1253RS-12P	13.75	19.95
13	A1253RS-13P	15.00	21.20
14	A1253RS-14P	16.25	22.45
15	A1253RS-15P	17.50	23.70
16	A1253RS-16P	18.75	24.95
20	A1253RS-20P	23.75	29.95
25	A1253RS-25P	30.00	36.20
30	A1253RS-30P	36.25	42.45

PIN针	2--16	BRASS	HIGH TEMPERATURE WHDLE TIN
定位片	2	BRASS	HIGH TEMPERATURE WHDLE TIN
壳体	1	PA6T UL 94V-0	MATURE

PART NAME	PART NO.	MATERIALS	SPEC
REV: A	APPROVE	CHECK	DRAWN
SHEET:1/1	FENG	ZENG	LIJIAN

MATERIAL:	GENERAL TOLERANCE	
UNIT: MM	X. ±0.30	X.* ±2°
SCALE: 3:1	X.X ±0.25	X.X* ±1°
SIZE: A4	X.XX ±0.15	⊕ ⊖

**YSTZ 东莞市轩盟电子科技有限公司**  
 DONGGUAN YSTZ ELECTRONIC TECHNOLOGY CO.,LTD

PART NO: A1253RS-NP-30E-01

TITLE : DF14 1.25mm Pitch 90°-Smt-Wafer